

ADA COMPLIANT STROBE V-5580041

INTRODUCTION

These instructions contain the specifications and information necessary to install, operate, and maintain the ADA Compliant Strobe.



SPECIFICATIONS

Features

- Cost effective and versatile solution to applications requiring visual alerts or strobes
- ADA compliant with a 110 Candella rating
- Typical coverage of 4900 sq. ft. @ 80" mounting height
- Supplied with accessories to fit almost any application

Activation Methods

- 70 volt amplified speaker signal
- Dry contact closure
- Electronic Message Sign 5V signal

Dimensions/Weight

- 4.50"H x 4.50"W x 4.55"D
(11.43cm H x 11.43cm W x 11.56cm D)
- 1.38 lbs. (.63 kg)

Specifications

- | | |
|--|-----------------|
| • Brightness | 110 Candella |
| • Power supply operating voltage input | 110VAC |
| • Strobe minimum operating voltage | 18VDC |
| • Strobe maximum operating voltage | 30VDC |
| • Current draw | 225mA |
| • Maximum instantaneous | 450mA |
| • Activation voltage requirements | |
| - Electronic message sign | 40µA at 3 volts |
| - 70 volt audio signal | 70 volts peak |
| • Activation voltage 70 volts minimum | 5 volts |
| • Environmental Rating | Indoor |
| • Connector Cable footage | 6 feet |
| • Mounting hardware | 2 wall hangers |
| • Lens color | Clear |
| • Faceplate cover | Ivory |
| • Metal case | Silver |

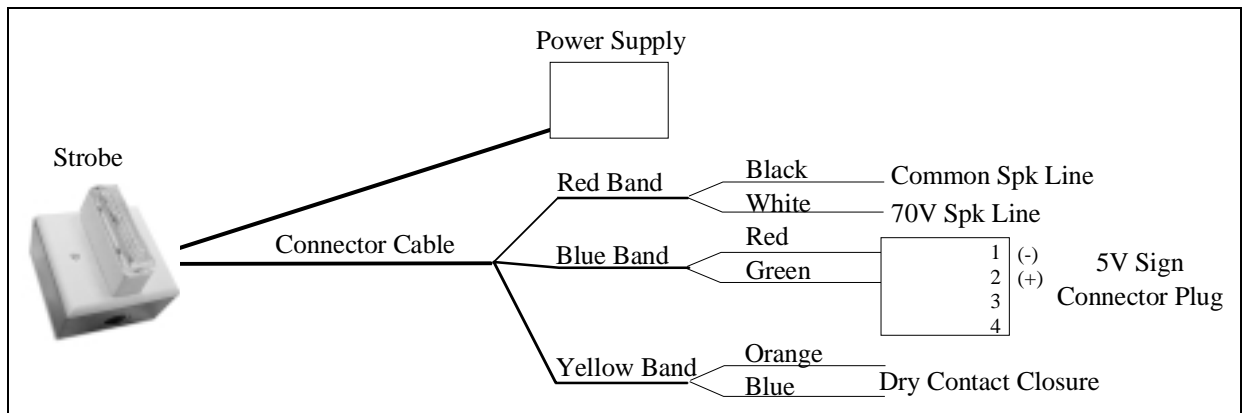


Figure 1. Connecting the ADA Compliant Strobe

TECHNICAL ASSISTANCE

When calling, have a VOM and a telephone test set available and call from the job site. Call (800) 782-5266 and ask for PagePac Technical Support, or call (540) 427-6000 for Valcom 24-hour Automated Support or visit our websites at <http://www.pagepac.com> and www.valcom.com.

Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

Valcom, Inc.
PagePac® Repair Dept.
5614 Hollins Road
Roanoke, VA 24019-5056