

Panasonic

P PROGRAMMING T TABLES

The programming tables are designed to be used as a hard copy reference for entering user-programmed data.

MODEL

KX-TD816 / KX-TD1232

Contents

Programming Flowchart.....	6	[112] Network Type Assignment	69
Manager Programming		[113] VM Status DTMF Set.....	69
[000] Date and Time Set.....	7	[114] VM Command DTMF Set.....	69
[001] System Speed Dialing Number Set.....	8 – 17	[115] Adjust Time	69
[002] System Speed Dialing Name Set	8 – 17	[116] ROM Version Display.....	69
[003] Extension Number Set	116 – 119	[117] Voice Mail Number Assignment	70
[004] Extension Name Set.....	116 – 119	[118] Voice Mail Extension Number Assignment	70
[005] Flexible CO Button Assignment.....	18 – 49	[119] Voice Mail Extension Group Assignment	70
[006] Operator / Manager Extension Assignment.....	7	[120] User Password	71
[007] DSS Console Port and Paired Telephone Assignment	7	[121] Walking COS Password.....	71
[008] Absent Messages	50	[122] UCD Overflow.....	71
[009] Quick Dial Number Set	50	[123] UCD Time Table.....	71
[012] ISDN Extension Number Set.....	50	[124] Phantom Extension Number Assignment.....	72
[013] ISDN Extension Name Set	50	[125] Area Code Assignment	71
[014] VM Name Set	51	[126] Caller ID Modification for Local Call.....	71
[017] DISA User Codes (TD1232 only)	52	[127] Caller ID Modification for Long Distance Call.....	71
System Programming		[128] PBX Code	71
[100] Flexible Numbering	53 – 55	[130] Message Waiting Control.....	73
[101] Day / Night Service Switching Mode.....	56	[131] Message Waiting Lamp Assignment	73
[102] Day / Night Service Starting Time	56	[132] Message Waiting Port Set.....	73
[103] Automatic Access Outside Line Group Assignment	56	[133] Caller ID Extension Assignment	73
[105] Account Codes.....	57	[134] Hotel Application.....	73
[106] Station Hunting Type	58	[135] DID Number Conversion Selection.....	73
[107] System Password	58	[136] DID Number Assignment	74 – 81
[108] Automatic Hold by CO / DSS Button.....	58	[137]–[138] DID Extension — Day / Night.....	74 – 81
[109] Expansion Unit Type	58	[139] DID Extension Name Set.....	74 – 81
[110] Caller ID Code Set.....	59 – 68	[150] Lunch Service Starting / Ending Time	56
[111] Caller ID Name Set.....	59 – 68	[151] Break Service Starting / Ending Time	56


Timer Programming		[330] ARS Modify Removed Digit	85 – 92
[200] Hold Recall Time	82	[331] ARS Modify Added Number	85 – 92
[201] Transfer Recall Time	82	[332] Extra Entry Table Selection	93
[202] Call Forwarding – No Answer Time	82	[333] TRS Entry Code Assignment for Extra Table	93 – 95
[203] Intercept Time	82	[334] Emergency Dial Number Set	84
[204] Pickup Dial Waiting Time	82	[340] TIE Line Routing Table	96
[205] Extension-to-Outside Line Call Duration Time	82	[341] TIE Modify Removed / Added Digit	96
[206] Outside-to-Outside Line Call Duration Time	82	Outside Line Programming	
[207] First Digit Time	82	[400] Outside Line Connection Assignment	97 – 98
[208] Inter Digit Time	82	[401] Outside Line Group Assignment	97 – 98
[211] Dial Start Time	82	[402] Dial Mode Selection	97
[212] Call Duration Count Start Time	82	[403] Pulse Speed Selection	97
[213] DISA Delayed Answer Time (TD1232 only)	82	[404] DTMF Time	97
[214] DISA Prolong Time (TD1232 only)	82	[405] CPC Signal Detection Incoming Set	97
[215] Outgoing Message Time (TD1232 only)	82	[406] Caller ID Assignment	97
[216] Message Waiting Ring Interval Time	82	[407]–[408] DIL 1:1 Extension — Day / Night	99
[217] Timed Reminder Alarm Ring Time	82	[409]–[410] Intercept Extension — Day / Night	100
[218] DISA AA Wait Time (TD1232 only)	82	[411] Host PBX Access Codes	100
[219] Call Park Recall Time	82	[412] Pause Time	100
[220] TIE First / Inter Digit Time	82	[413] Flash Time	100
TRS / ARS Programming		[414] Disconnect Time	100
[300] TRS Override for System Speed Dialing	83	[415] CPC Signal Detection Outgoing Set	99
[301]–[305] TRS Denied Code Entry for Levels 2 through 6	83	[416] Reverse Circuit Assignment	99
[306]–[310] TRS Excepted Code Entry for Levels 2 through 6	83	[417] Outside Line Name Assignment	101 – 102
[311] Special Carrier Access Codes	83	[418] Outside Line Number Assignment for PRI CLIP (TD1232 only)	102
[312] ARS Mode	84	[419] ISDN Outgoing CLIR Service Assignment	101
[313] ARS Time	84	[420] ISDN Ring Service Assignment	101
[314]–[321] ARS Leading Digit Entry for Plans 1 through 8	85 – 92	[423] ISDN Port Type	103
[322]–[329] ARS Routing Plans 1 through 8	85 – 92	[424] ISDN Layer 1 Active Mode	103

Contents

[425]	ISDN Configuration.....	103	[467]–[468]	DIL 1:1 Extension — Lunch / Break (TD1232 only).....	110
[426]	ISDN Data Link Mode.....	103	COS Programming		
[427]	ISDN TEI Mode	103	[500]–[501]	Toll Restriction Level — Day / Night.....	113
[428]	ISDN Extension Multiple Directory Number.....	103	[502]	Extension-to-Outside Line Call Duration Limit	113
[429]	ISDN Extension Progress Tone	103	[503]	Call Transfer to Outside Line	113
[430]	DID / TIE Format Number Assignment	104	[504]	Call Forwarding to Outside Line	113
[431]	DID / TIE Incoming Assignment	104	[505]	Executive Busy Override.....	113
[432]	DID / TIE Outgoing Assignment.....	104	[506]	Executive Busy Override Deny	113
[433]	DID / TIE Subscriber Number Removed Digit	104	[507]	Do Not Disturb Override	113
[434]	DID / TIE Added Number	104	[508]	Account Code Entry Mode	114
[435]	DID / TIE Wink Time Out Assignment.....	104	[509]	Off-Hook Call Announcement (OHCA).....	114
[436]	CO-to-TIE Transfer	105	[510]	Night Service Access.....	114
[437]	TIE-to-CO Transfer	105	[511]	PITS Programming Level.....	114
[438]	TIE-to-TIE Transfer.....	105	Extension Programming		
[439]	TIE Security Type.....	105	[600]	EXtra Device Port.....	115
[440]	Line Hunting Sequence.....	105	[601]	Class of Service	116 – 119
[453]	SPID Assignment.....	106 – 109	[602]	Extension Group Assignment.....	116 – 119
[454]	DN Assignment	106 – 109	[603]–[604]	DIL 1:N Extension and Delayed Ringing — Day / Night	120 – 143
[455]–[456]	Extension Ringing Assignment — Day / Night for ISDN.....	106 – 109	[605]–[606]	Outgoing Permitted Outside Line Assignment — Day / Night	144 – 151
[457]–[458]	DIL 1:1 — Lunch / Break Group.....	110	[607]–[608]	Doorphone Ringing Assignment — Day / Night.....	152 – 155
[460]	PRI Connection Assignment (TD1232 only)	111	[609]	Voice Mail Access Codes	152 – 155
[461]	PRI Line Coding Assignment (TD1232 only).....	111	[610]	Live Call Screening Recording Mode Assignment	115
[462]	PRI Frame Sequence Assignment (TD1232 only)	111	[613]	ISDN Class of Service	50
[463]	PRI Timer 1 and Timer 2 Assignment (TD1232 only).....	112	[614]–[615]	Outgoing Permitted Outside Line Assignment — Day / Night for ISDN Extension	156 – 157
[464]	PRI Inter Digit Timer 1 Assignment (TD1232 only)	111	[619]	Extension Call Forwarding — No Answer Time	158
[465]	PRI Inter Digit Timer 2 Assignment (TD1232 only)	111	[620]	Lunch / Break Group Assignment	159
[466]	PRI Dial Counter for Inter Digit Timer 2 Assignment (TD1232 only)	111			

[621] Cordless PITS Extension Port	160	[725] T1 Extension Number (TD1232 only).....	165
[622] Extension CLIP Number Assignment (TD1232 only)	116 – 119	[726] T1 Extension Name (TD1232 only)	165
[624] ISDN Extension CLIP Number Assignment (TD1232 only)...	114	[727] T1 Extension COS Number (TD1232 only).....	165
T1 Programming		[728] T1 Extension Outgoing Permitted Outside Line Assignment — Day (TD1232 only).....	165
[700] T1 Channel Assignment (TD1232 only)	161	[729] T1 Extension Outgoing Permitted Outside Line Assignment — Night (TD1232 only)	165
[701] T1 Dial Mode (TD1232 only).....	161	[730] T1 Extension Voice Mail Access Codes (TD1232 only).....	165
[702] T1 COT CPC (IN) (TD1232 only)	162	Resource Programming	
[703] T1 DID CPC (IN) (TD1232 only)	162	[800] SMDR Incoming / Outgoing Call Log Printout	166
[704] T1 COT CPC (OUT) (TD1232 only)	162	[801] SMDR Format	166
[705] T1 DID CPC (OUT) (TD1232 only)	162	[802] System Data Printout	166
[706] T1 DID Receive Digits (TD1232 only).....	162	[803] Music Source Use	166
[707] T1 Clock Mode (TD1232 only).....	163	[804] External Pager BGM.....	166
[708] T1 Line Coding (TD1232 only).....	163	[805] External Pager Confirmation Tone	166
[709] T1 Frame Sequence (TD1232 only)	163	[806]–[807] Serial Interface (RS-232C) Parameters — Port 1 / Port 2 ..	166
[710] T1 Frame Option (TD1232 only)	163	([807] for Port 2 is available for TD1232 only.)	
[711] T1 First Dial Timer (CO) (TD1232 only).....	163	[809] DISA Security Type (TD1232 only).....	167
[712] T1 First Dial Timer (DID / TIE) (TD1232 only).....	163	[810] DISA Tone Detection (TD1232 only)	167
[713] T1 %Break (TD1232 only).....	163	[812] DISA DTMF Repeat (TD1232 only).....	167
[714] T1 Dial Click Tone (TD1232 only)	163	[813] Floating Number Assignment.....	167
[715] T1 Inter Digit Pause (TD1232 only).....	163	[814] Modem Standard	167
[716] T1 Flash Detection (TD1232 only).....	163	[815] DISA Built-in Auto Attendant (TD1232 only).....	167
[717] T1 Answer Decision Timer (TD1232 only)	163	[817] KX-TD197 Baud Rate Set	168
[718] T1 Break Detection (TD1232 only).....	163	[818] Doorphone Tone Frequency Selection.....	168
[719] T1 Pulse Type (TD1232 only)	163	[820] Doorphone Ringing Time	168
[720] T1 TIE Ringing Service (TD1232 only).....	164	Option Programming	
[721] T1 / PRI Reference CO (TD1232 only).....	164	[990] System Additional Information	169 – 170
[722] T1 Answer Wait Timer (TD1232 only)	164	[991] COS Additional Information	171 – 172
[723] T1 Sending TIE Caller ID (TD1232 only)	164		

Programming Flowchart

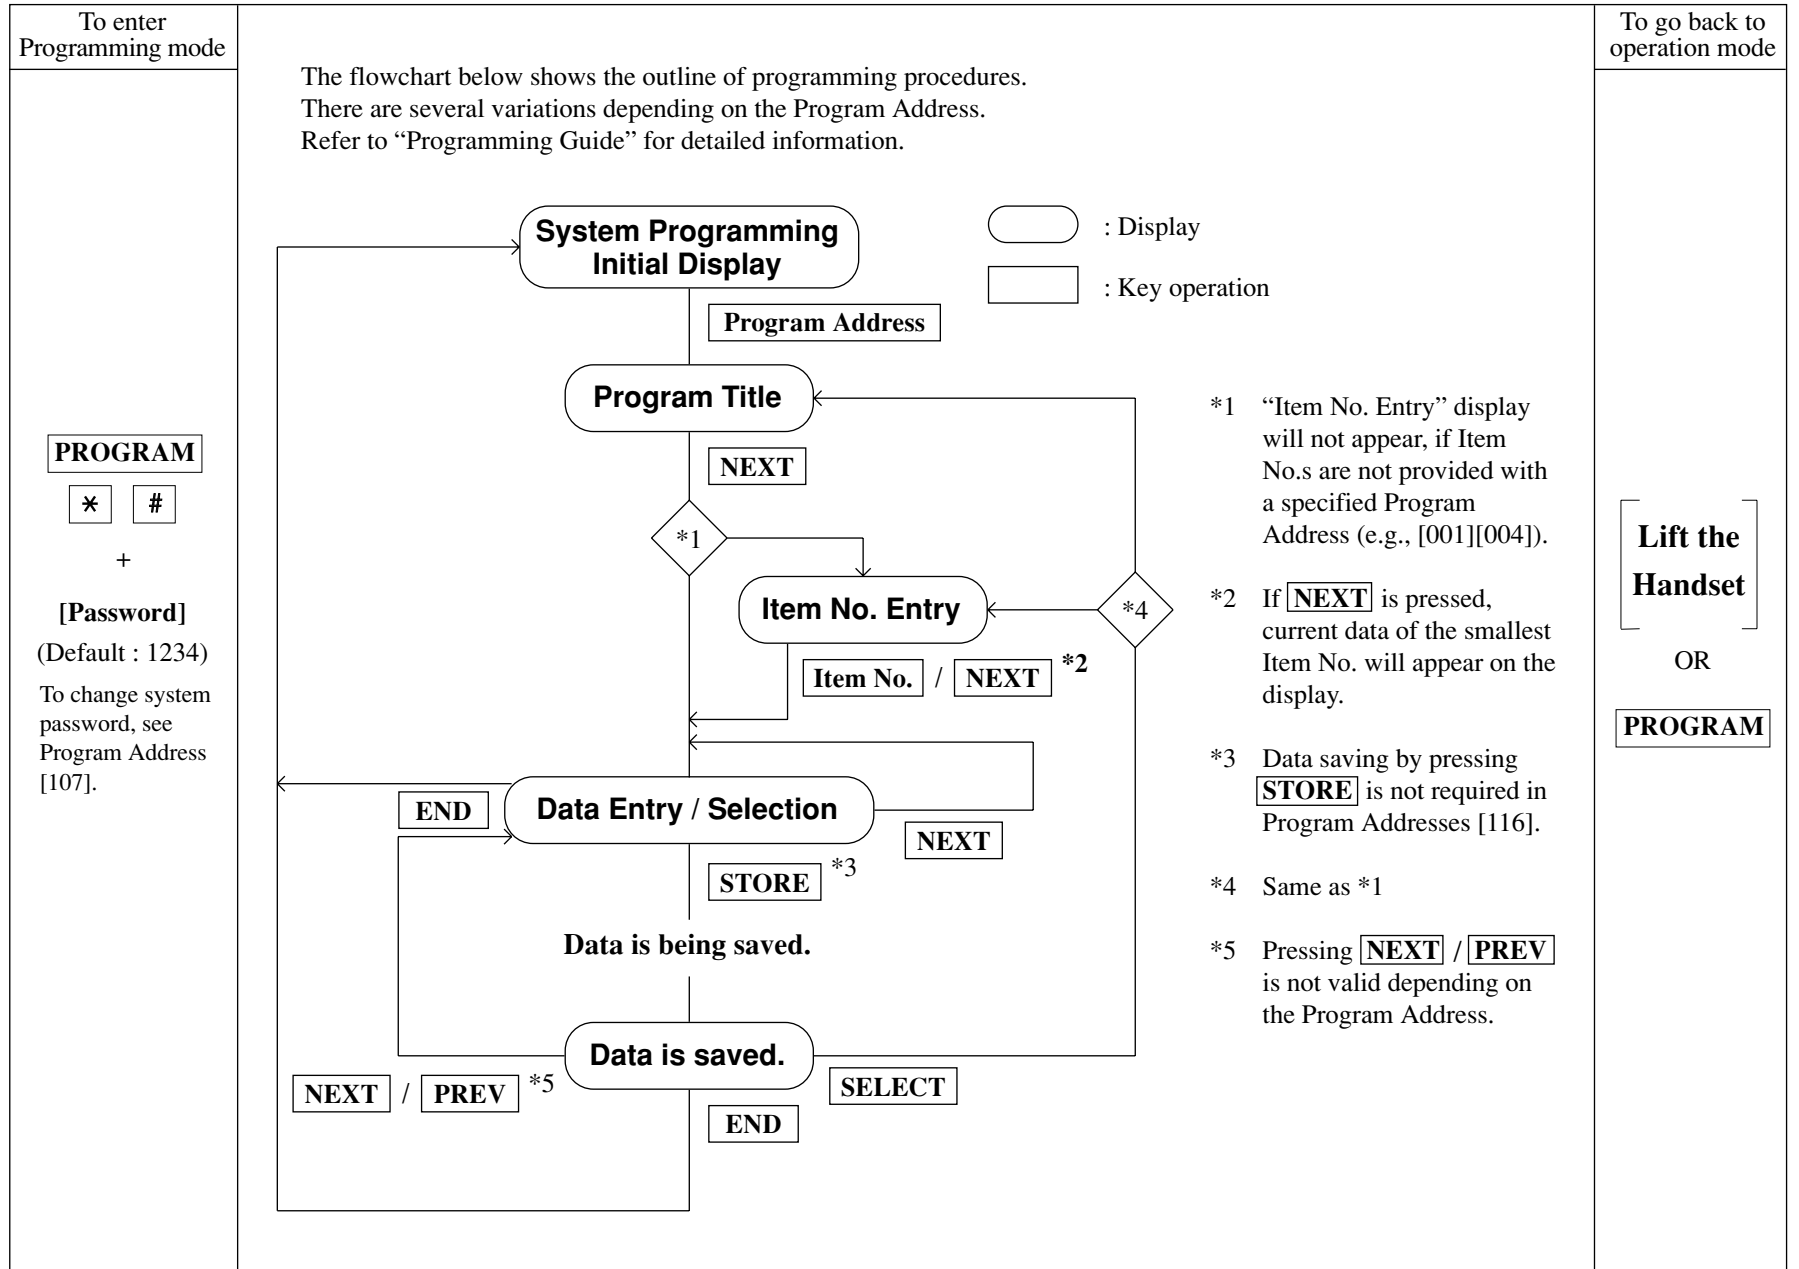

[000] Date and Time Set								
	Year (00 – 99)	Month (Jan. – Dec.)	Day (1 – 31)	Day of the Week (SUN – SAT)	Hour (1– 12)	Minute (00 – 59)	AM / PM	Hour format (12 / 24)
Default	'93	Jan.	1	FRI	12	00	AM	12
Change								

[006] Operator / Manager Extension Assignment		
Item	Default	Parameter Jack 01 – 16 (TD816) Jack 01 – 64 (TD1232)
Operator 1	Jack 01	
Operator 2	Not Stored	
Manager	Not Stored	

[007] DSS Console Port and Paired Telephone Assignment		
Item :	Parameter : Jack No.	
DSS 1 – 8	DSS Console	Paired Telephone
Default : all	Default is Not Stored.	
DSS 1		
DSS 2		
DSS 3		
DSS 4		
DSS 5		
DSS 6		
DSS 7		
DSS 8		
Selection : (TD816) DSS 1 – 4: Jack 02-16* (TD1232) DSS 1 – 4 (Master): Jack 02-32* DSS 5 – 8 (Slave): Jack 33-64* *(Jack 01 is available for Paired Telephone only.)		

001, 002

[001] – [002] System Speed Dialing Number / Name Set					
Item : SPD No.	Parameter for [001] : Telephone Number (24 digits max.)	Parameter for [002] : Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
Default	All : Not Stored				
000			025		
001			026		
002			027		
003			028		
004			029		
005			030		
006			031		
007			032		
008			033		
009			034		
010			035		
011			036		
012			037		
013			038		
014			039		
015			040		
016			041		
017			042		
018			043		
019			044		
020			045		
021			046		
022			047		
023			048		
024			049		

(Continued)					
Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
050			075		
051			076		
052			077		
053			078		
054			079		
055			080		
056			081		
057			082		
058			083		
059			084		
060			085		
061			086		
062			087		
063			088		
064			089		
065			090		
066			091		
067			092		
068			093		
069			094		
070			095		
071			096		
072			097		
073			098		
074			099		

001, 002

[001] – [002] System Speed Dialing Number / Name Set					
Item : SPD No.	Parameter for [001] : Telephone Number (24 digits max.)	Parameter for [002] : Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
Default	All : Not Stored				
100			125		
101			126		
102			127		
103			128		
104			129		
105			130		
106			131		
107			132		
108			133		
109			134		
110			135		
111			136		
112			137		
113			138		
114			139		
115			140		
116			141		
117			142		
118			143		
119			144		
120			145		
121			146		
122			147		
123			148		
124			149		

(Continued)					
Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
150			175		
151			176		
152			177		
153			178		
154			179		
155			180		
156			181		
157			182		
158			183		
159			184		
160			185		
161			186		
162			187		
163			188		
164			189		
165			190		
166			191		
167			192		
168			193		
169			194		
170			195		
171			196		
172			197		
173			198		
174			199		

001, 002

[001] – [002] System Speed Dialing Number / Name Set					
Item : SPD No.	Parameter for [001] : Telephone Number (24 digits max.)	Parameter for [002] : Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
Default	All : Not Stored				
200			225		
201			226		
202			227		
203			228		
204			229		
205			230		
206			231		
207			232		
208			233		
209			234		
210			235		
211			236		
212			237		
213			238		
214			239		
215			240		
216			241		
217			242		
218			243		
219			244		
220			245		
221			246		
222			247		
223			248		
224			249		

(Continued)					
Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
250			275		
251			276		
252			277		
253			278		
254			279		
255			280		
256			281		
257			282		
258			283		
259			284		
260			285		
261			286		
262			287		
263			288		
264			289		
265			290		
266			291		
267			292		
268			293		
269			294		
270			295		
271			296		
272			297		
273			298		
274			299		

001, 002

[001] – [002] System Speed Dialing Number / Name Set					
Item : SPD No.	Parameter for [001] : Telephone Number (24 digits max.)	Parameter for [002] : Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
Default	All : Not Stored				
300			325		
301			326		
302			327		
303			328		
304			329		
305			330		
306			331		
307			332		
308			333		
309			334		
310			335		
311			336		
312			337		
313			338		
314			339		
315			340		
316			341		
317			342		
318			343		
319			344		
320			345		
321			346		
322			347		
323			348		
324			349		

(Continued)					
Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
350			375		
351			376		
352			377		
353			378		
354			379		
355			380		
356			381		
357			382		
358			383		
359			384		
360			385		
361			386		
362			387		
363			388		
364			389		
365			390		
366			391		
367			392		
368			393		
369			394		
370			395		
371			396		
372			397		
373			398		
374			399		

001, 002

[001] – [002] System Speed Dialing Number / Name Set					
Item : SPD No.	Parameter for [001] : Telephone Number (24 digits max.)	Parameter for [002] : Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
Default	All : Not Stored				
400			425		
401			426		
402			427		
403			428		
404			429		
405			430		
406			431		
407			432		
408			433		
409			434		
410			435		
411			436		
412			437		
413			438		
414			439		
415			440		
416			441		
417			442		
418			443		
419			444		
420			445		
421			446		
422			447		
423			448		
424			449		

(Continued)					
Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)	Item : SPD No.	Parameter for [001]: Telephone Number (24 digits max.)	Parameter for [002]: Name (10 characters max.)
450			475		
451			476		
452			477		
453			478		
454			479		
455			480		
456			481		
457			482		
458			483		
459			484		
460			485		
461			486		
462			487		
463			488		
464			489		
465			490		
466			491		
467			492		
468			493		
469			494		
470			495		
471			496		
472			497		
473			498		
474			499		

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 01 (KX-T)			Jack 02 (KX-T)			Jack 03 (KX-T)			Jack 04 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 01 (KX-T)			Jack 02 (KX-T)			Jack 03 (KX-T)			Jack 04 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 05 (KX-T)			Jack 06 (KX-T)			Jack 07 (KX-T)			Jack 08 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 05 (KX-T)			Jack 06 (KX-T)			Jack 07 (KX-T)			Jack 08 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 09 (KX-T)			Jack 10 (KX-T)			Jack 11 (KX-T)			Jack 12 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 09 (KX-T)			Jack 10 (KX-T)			Jack 11 (KX-T)			Jack 12 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 13 (KX-T)			Jack 14 (KX-T)			Jack 15 (KX-T)			Jack 16 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 13 (KX-T)			Jack 14 (KX-T)			Jack 15 (KX-T)			Jack 16 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 17 (KX-T)			Jack 18 (KX-T)			Jack 19 (KX-T)			Jack 20 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 17 (KX-T)			Jack 18 (KX-T)			Jack 19 (KX-T)			Jack 20 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 21 (KX-T)			Jack 22 (KX-T)			Jack 23 (KX-T)			Jack 24 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 21 (KX-T)			Jack 22 (KX-T)			Jack 23 (KX-T)			Jack 24 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 25 (KX-T)			Jack 26 (KX-T)			Jack 27 (KX-T)			Jack 28 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 25 (KX-T)			Jack 26 (KX-T)			Jack 27 (KX-T)			Jack 28 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 29 (KX-T)			Jack 30 (KX-T)			Jack 31 (KX-T)			Jack 32 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 29 (KX-T)			Jack 30 (KX-T)			Jack 31 (KX-T)			Jack 32 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 33 (KX-T)			Jack 34 (KX-T)			Jack 35 (KX-T)			Jack 36 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 33 (KX-T)			Jack 34 (KX-T)			Jack 35 (KX-T)			Jack 36 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 37 (KX-T)			Jack 38 (KX-T)			Jack 39 (KX-T)			Jack 40 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 37 (KX-T)			Jack 38 (KX-T)			Jack 39 (KX-T)			Jack 40 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 41 (KX-T)			Jack 42 (KX-T)			Jack 43 (KX-T)			Jack 44 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 41 (KX-T)			Jack 42 (KX-T)			Jack 43 (KX-T)			Jack 44 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 45 (KX-T)			Jack 46 (KX-T)			Jack 47 (KX-T)			Jack 48 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 45 (KX-T)			Jack 46 (KX-T)			Jack 47 (KX-T)			Jack 48 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 49 (KX-T)			Jack 50 (KX-T)			Jack 51 (KX-T)			Jack 52 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 49 (KX-T)			Jack 50 (KX-T)			Jack 51 (KX-T)			Jack 52 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 53 (KX-T)			Jack 54 (KX-T)			Jack 55 (KX-T)			Jack 56 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 53 (KX-T)			Jack 54 (KX-T)			Jack 55 (KX-T)			Jack 56 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)
 <Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 57 (KX-T)			Jack 58 (KX-T)			Jack 59 (KX-T)			Jack 60 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 57 (KX-T)			Jack 58 (KX-T)			Jack 59 (KX-T)			Jack 60 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

[005] Flexible CO Button Assignment													Selection of Value: BC (Button Code) : 0 – 6, 70 – 73, 8, 90 – 93, * and #. 0 : S-CO 1 : DSS 2 : One-Touch Dialing 3 : MESSAGE (Own/ Another/Phantom Extension) 4 : FWD / DND 5 : SAVE 6 : Account 70 : Conference 71 : Log-In / Log-Out 72 : Phantom 73 : Night 8 : Voice Mail Transfer 90 : Two-Way Record 91 : Two-Way Transfer 92 : Live Call Screening 93 : Live Call Screening Cancel * : L-CO # : G-CO Parameter : Codes 0, 1, 2, 8, 90, 91 and # require parameters. 0 (S-CO) : CO line number (TD816; 01 – 08 TD1232; 01 – 48) 1 (DSS) : Extension number (2 – 4 digits) 2 (One-Touch Dialing) : Telephone number (16 digits max.)
Flexible Button	Jack 61 (KX-T)			Jack 62 (KX-T)			Jack 63 (KX-T)			Jack 64 (KX-T)			
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2												
CO 01													
CO 02													
CO 03													
CO 04													
CO 05													
CO 06													
CO 07													
CO 08													
CO 09													
CO 10													
CO 11													
CO 12													
CO 13													
CO 14													
CO 15													
CO 16													
CO 17													
CO 18													
CO 19													
CO 20													
CO 21													
CO 22													
CO 23													
CO 24													

[005] Flexible CO Button Assignment												
Flexible Button	Jack 61 (KX-T)			Jack 62 (KX-T)			Jack 63 (KX-T)			Jack 64 (KX-T)		
	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R	BC	Parameter	R
Default	All Jacks : CO 01 through 48 — BC = S-CO 01 through 48, R=2											
CO 25												
CO 26												
CO 27												
CO 28												
CO 29												
CO 30												
CO 31												
CO 32												
CO 33												
CO 34												
CO 35												
CO 36												
CO 37												
CO 38												
CO 39												
CO 40												
CO 41												
CO 42												
CO 43												
CO 44												
CO 45												
CO 46												
CO 47												
CO 48												

3 (Another Extension Message Waiting/ Phantom Extension Message Waiting) : Another/Phantom extension number (2 – 4 digits)
72 (Phantom) : Voice mail extension number
73 (Night)
8 (Voice Mail Transfer) : Voice mail extension number (2 – 4 digits)
90 (Two-Way Record) : Voice mail extension number (2 – 4 digits)
91 (Two-Way Transfer) : Voice mail extension number (2 – 4 digits)
(G-CO) : CO Line Group number (1 – 8)
R (Ringer) : Type (1 – 8)

<Note>
 Jack No.
 TD816: 01 – 16
 TD1232: 01 – 32 (Master)
 33 – 64 (Slave)

008, 009, 012, 013, 613

[008] Absent Messages		
Item	Default	Parameter
Message 1	Will Return Soon	
Message 2	Gone Home	
Message 3	At EXT %%%	
Message 4	Back at %%:%%	
Message 5	Out Until %%/%%	
Message 6	In a Meeting	
Message 7		
Message 8		
Message 9		
Selection : 16 characters (max.) You can use “%” as a variable character that can be entered at each station.		

[009] Quick Dial Number Set	
Item : Location Number	Parameter : 16 digits max, consisting of 0 – 9. Default : all – Not Stored
1	
2	
3	
4	
5	
6	
7	
8	

	[012] ISDN Extension Number Set	[013] ISDN Extension Name Set	[613] ISDN Class of Service
Item: ISDN Port No.	Parameter : Extension No. (2 or 3 digits)	Parameter : Name (Max.10 characters)	Parameter : COS No. (1 – 8)
Default: all	Not Stored	Not Stored	COS 1
All ports			
01			
02			
03			
04			
05			
06			
07			
08			
09			
10			
11			
12			

<Note> ISDN Port No.: TD816 (01 – 06), TD1232 (01 – 06/Master, 07 – 12/Slave)

Item : VM No.	[014] VM Name Set				
	Parameter : Name (Max.10 characters)		Item : VM No.	Parameter : Name (Max.10 characters)	
	Default	Change			Default
01	V. Mail 01		13	V. Mail 13	
02	V. Mail 02		14	V. Mail 14	
03	V. Mail 03		15	V. Mail 15	
04	V. Mail 04		16	V. Mail 16	
05	V. Mail 05		17	V. Mail 17	
06	V. Mail 06		18	V. Mail 18	
07	V. Mail 07		19	V. Mail 19	
08	V. Mail 08		20	V. Mail 20	
09	V. Mail 09		21	V. Mail 21	
10	V. Mail 10		22	V. Mail 22	
11	V. Mail 11		23	V. Mail 23	
12	V. Mail 12		24	V. Mail 24	

<Note> VM no. : TD816 (01 – 12),
 TD1232 (01 – 24)

[017]* DISA User Codes									
Item	Default		Parameter		Item	Default		Parameter	
	Code	COS	Code (4 – 10 digits)	COS (1 – 8)		Code	COS	Code (4 – 10 digits)	COS (1 – 8)
Code 1	Blank	8			Code 17	Blank	8		
Code 2	Blank	8			Code 18	Blank	8		
Code 3	Blank	8			Code 19	Blank	8		
Code 4	Blank	8			Code 20	Blank	8		
Code 5	Blank	8			Code 21	Blank	8		
Code 6	Blank	8			Code 22	Blank	8		
Code 7	Blank	8			Code 23	Blank	8		
Code 8	Blank	8			Code 24	Blank	8		
Code 9	Blank	8			Code 25	Blank	8		
Code 10	Blank	8			Code 26	Blank	8		
Code 11	Blank	8			Code 27	Blank	8		
Code 12	Blank	8			Code 28	Blank	8		
Code 13	Blank	8			Code 29	Blank	8		
Code 14	Blank	8			Code 30	Blank	8		
Code 15	Blank	8			Code 31	Blank	8		
Code 16	Blank	8			Code 32	Blank	8		

[100] Flexible Numbering							
Item	Feature	Default	Parameter	Item	Feature	Default	Parameter
01	1st hundred extension block	1		21	Station speed dialing	3 *	
02	2nd hundred extension block	2		22	Station speed dialing programming	30	
03	3rd hundred extension block	—		23	Doorphone call	31	
04	4th hundred extension block	—		24	Paging – external	32	
05	5th hundred extension block	—		25	Paging – external answer / TAFAS answer	42	
06	6th hundred extension block	—		26	Paging – group	33	
07	7th hundred extension block	—		27	Paging – group answer	43	
08	8th hundred extension block	—		28	Call pickup, outside line	4 *	
09	9th hundred extension block	—		29	Call pickup, group	40	
10	10th hundred extension block	—		30	Call pickup, directed	41	
11	11th hundred extension block	—		31	Call hold	50	
12	12th hundred extension block	—		32	Call hold retrieve – intercom	51	
13	13th hundred extension block	—		33	Call hold retrieve – outside line	53	
14	14th hundred extension block	—		34	Last number redial	#	
15	15th hundred extension block	—		35	Call park / Call park retrieve	52	
16	16th hundred extension block	—		36	Account code entry	49	
17	Operator call	0		37	Door opener	55	
18	Automatic line access / ARS	9		38	External feature access	6	
19	Outside line group line access	8		39	Station program clear	790	
20	System speed dialing	*		40	Message waiting	70	

(Selection) No.1 – 16, 74 – 89 : 1 or 2 digits, No.17 – 73, 90 – 93 : 1 – 3 digits (Valid Entries) No.1 – 16 : 0 – 9, No.17 – 93 : 0 – 9, * , #

[100] Flexible Numbering							
Item	Feature	Default	Parameter	Item	Feature	Default	Parameter
41*	Outgoing message	36		61	External modem control	791	
42	Call forwarding / Do not disturb	710		62	System working report	794	
43	Call pickup deny	720		63	Quick dial location number 1	—	
44	Data line security	730		64	Quick dial location number 2	—	
45	Call waiting / OHCA / Whisper OHCA	731		65	Quick dial location number 3	—	
46	Executive busy override deny	733		66	Quick dial location number 4	—	
47	Pickup dialing program	74		67	Quick dial location number 5	—	
48	Absent message	750		68	Quick dial location number 6	—	
49	Timed reminder	76		69	Quick dial location number 7	—	
50	Electronic station lockout	77		70	Quick dial location number 8	—	
51	Day / Lunch / Break / Night service mode	78		71	Gather	—	
52	Paralleled telephone mode	39		72	Reserved	—	
53	Background music – external	35		73*	TIE line access code	—	
54	LCS password	799		74*	Other PBX Extension 01	—	
55	Call log, incoming	56		75*	Other PBX Extension 02	—	
56	Call log lock, incoming	57		76*	Other PBX Extension 03	—	
57	Timed reminder, remote	7 *		77*	Other PBX Extension 04	—	
58	Log-in / log-out	45		78*	Other PBX Extension 05	—	
59	Automatic callback busy cancel	46		79*	Other PBX Extension 06	—	
60	Walking COS	47		80*	Other PBX Extension 07	—	
(Selection) No.1 – 16, 74 – 89 : 1 or 2 digits, No.17 – 73, 90 – 93 : 1 – 3 digits (Valid Entries) No.1 – 16 : 0 – 9, No.17 – 93 : 0 – 9, * , #							

[100] Flexible Numbering			
Item	Feature	Default	Parameter
81*	Other PBX Extension 08	—	
82*	Other PBX Extension 09	—	
83*	Other PBX Extension 10	—	
84*	Other PBX Extension 11	—	
85*	Other PBX Extension 12	—	
86*	Other PBX Extension 13	—	
87*	Other PBX Extension 14	—	
88*	Other PBX Extension 15	—	
89*	Other PBX Extension 16	—	
90	Paging – deny	721	
91	Hotel application – room status	736	
92*	CLIP	711	
93	CLIR	59	
(Selection) No.1 – 16, 74 – 89 : 1 or 2 digits, No.17 – 73, 90 – 93 : 1 – 3 digits (Valid Entries) No.1 – 16 : 0 – 9, No.17 – 93 : 0 – 9, *, #			

*: Available for TD1232 only.

101 – 103, 150, 151

[101] Day / Night Service Switching Mode		
	Default	Selection
Manual	✓	
Auto		

	[102] Day / Night Service Starting Time															
	Default		Change													
	everyday	everyday	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday							
Day	9 : 00	AM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Night	5 : 00	PM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Selection : Hour (1 – 12), Minute (0 – 59), [AM] or [PM]																

[103] Automatic Access Outside Line Group Assignment							
Default							
1	2	3	4	5	6	7	8
Outside Line Group No. (1 – 8) in desired order							

	[150] Lunch Service Starting / Ending Time															
	Default		Change													
	everyday	everyday	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday							
Starting	12 : 00	PM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Ending	12 : 59	PM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Selection : Hour (1 – 12), Minute (0 – 59), [AM] or [PM]																

	[151] Break Service Starting / Ending Time															
	Default		Change													
	everyday	everyday	Sunday	Monday	Tuesday	Wednesday	Thursday	Friday	Saturday							
Starting	3 : 00	PM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Ending	3 : 29	PM	:	:	:	:	:	:	:	:	:	:	:	:	:	:
Selection : Hour (1 – 12), Minute (0 – 59), [AM] or [PM]																

[105] Account Codes									
Parameter : Account Code (10 digits max., consisting of 0 – 9)									
Default : all Not Stored									
Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter
001		031		061		091		121	
002		032		062		092		122	
003		033		063		093		123	
004		034		064		094		124	
005		035		065		095		125	
006		036		066		096		126	
007		037		067		097		127	
008		038		068		098		128	
009		039		069		099			
010		040		070		100			
011		041		071		101			
012		042		072		102			
013		043		073		103			
014		044		074		104			
015		045		075		105			
016		046		076		106			
017		047		077		107			
018		048		078		108			
019		049		079		109			
020		050		080		110			
021		051		081		111			
022		052		082		112			
023		053		083		113			
024		054		084		114			
025		055		085		115			
026		056		086		116			
027		057		087		117			
028		058		088		118			
029		059		089		119			
030		060		090		120			

106 – 109

		[106] Station Hunting Type							
Selection	Default	Item : Extension Group							
	all	1	2	3	4	5	6	7	8
Disable	✓								
Terminate									
Circular									
Voice Mail									
Automated Attendant									
Ring Group									
UCD									

[107] System Password				
Default				Parameter :
				4 – 7 digits, 0 – 9
1	2	3	4	

[108] Automatic Hold by CO / DSS Button				
	DSS button		CO button	
	Default	Selection	Default	Selection
Enable	✓			
Disable			✓	

[109] Extension Unit Type																													
TD816	Area No.	1					2																						
	Selection	C	S2	S4	S6	BD	E	C	S2	S4	S6	BD	E																
	Default	✓													✓														
	Parameter																												
TD1232	Master System																												
	Area No.	1					2					3																	
	Selection	C	S2	S4	S6	PR	BD	T1	E1	E2	C	S2	S4	S6	PR	BD	T1	E1	E2	C	S2	S4	S6	PR	BD	T1	E1	E2	
	Default	✓																✓										✓	
	Parameter																												
	Slave System																												
	Area No.	1					2					3																	
	Selection	C	S2	S4	S6	BD	E1	E2	C	S2	S4	S6	BD	E1	E2	C	S2	S4	S6	BD	E1	E2	C	S2	S4	S6	BD	E1	E2
	Default	✓																											
	Parameter																												
<Note>																													
TD816 – C:4CO / S2:2ISDN / S4:4ISDN / S6:6ISDN / BD:4DID / E:8EXT																													
TD1232 – Master System = C:4CO / S2:2ISDN / S4:4ISDN / S6:6ISDN / PR:23PRI / BD:4DID / T1: 24T1 / E1:8EXT-1 / E2:8EXT-2																													
Slave System = C:4CO / S2:2ISDN / S4:4ISDN / S6:6ISDN / BD:4DID / E1:8EXT-1 / E2:8EXT-2																													

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
001			026		
002			027		
003			028		
004			029		
005			030		
006			031		
007			032		
008			033		
009			034		
010			035		
011			036		
012			037		
013			038		
014			039		
015			040		
016			041		
017			042		
018			043		
019			044		
020			045		
021			046		
022			047		
023			048		
024			049		
025			050		

110, 111

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
051			076		
052			077		
053			078		
054			079		
055			080		
056			081		
057			082		
058			083		
059			084		
060			085		
061			086		
062			087		
063			088		
064			089		
065			090		
066			091		
067			092		
068			093		
069			094		
070			095		
071			096		
072			097		
073			098		
074			099		
075			100		

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
101			126		
102			127		
103			128		
104			129		
105			130		
106			131		
107			132		
108			133		
109			134		
110			135		
111			136		
112			137		
113			138		
114			139		
115			140		
116			141		
117			142		
118			143		
119			144		
120			145		
121			146		
122			147		
123			148		
124			149		
125			150		

110, 111

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
151			176		
152			177		
153			178		
154			179		
155			180		
156			181		
157			182		
158			183		
159			184		
160			185		
161			186		
162			187		
163			188		
164			189		
165			190		
166			191		
167			192		
168			193		
169			194		
170			195		
171			196		
172			197		
173			198		
174			199		
175			200		

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
201			226		
202			227		
203			228		
204			229		
205			230		
206			231		
207			232		
208			233		
209			234		
210			235		
211			236		
212			237		
213			238		
214			239		
215			240		
216			241		
217			242		
218			243		
219			244		
220			245		
221			246		
222			247		
223			248		
224			249		
225			250		

110, 111

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
251			276		
252			277		
253			278		
254			279		
255			280		
256			281		
257			282		
258			283		
259			284		
260			285		
261			286		
262			287		
263			288		
264			289		
265			290		
266			291		
267			292		
268			293		
269			294		
270			295		
271			296		
272			297		
273			298		
274			299		
275			300		

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
301			326		
302			327		
303			328		
304			329		
305			330		
306			331		
307			332		
308			333		
309			334		
310			335		
311			336		
312			337		
313			338		
314			339		
315			340		
316			341		
317			342		
318			343		
319			344		
320			345		
321			346		
322			347		
323			348		
324			349		
325			350		

110, 111

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
351			376		
352			377		
353			378		
354			379		
355			380		
356			381		
357			382		
358			383		
359			384		
360			385		
361			386		
362			387		
363			388		
364			389		
365			390		
366			391		
367			392		
368			393		
369			394		
370			395		
371			396		
372			397		
373			398		
374			399		
375			400		

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
401			426		
402			427		
403			428		
404			429		
405			430		
406			431		
407			432		
408			433		
409			434		
410			435		
411			436		
412			437		
413			438		
414			439		
415			440		
416			441		
417			442		
418			443		
419			444		
420			445		
421			446		
422			447		
423			448		
424			449		
425			450		

110, 111

[110] – [111] Caller ID Code / Name Set					
Item : Location No.	Parameter for [110] : Caller ID Code (24 digits max.)	Parameter for [111] : Caller ID Name (15 characters max.)	Item : Location No.	Parameter for [110] : Caller ID Code	Parameter for [111] : Caller ID Name
Default	All : Not stored				
451			476		
452			477		
453			478		
454			479		
455			480		
456			481		
457			482		
458			483		
459			484		
460			485		
461			486		
462			487		
463			488		
464			489		
465			490		
466			491		
467			492		
468			493		
469			494		
470			495		
471			496		
472			497		
473			498		
474			499		
475			500		

[112] Network Type Assignment		
	Default	Selection
NI1	✓	
ATT Custom		

[113] VM Status DTMF Set		
Item	Default	Parameter : DTMF Signal No. (3 digits max.)
RBT	1	
BT	2	
ROT	3	
DND	4	
Answer	5	
FWD VM RBT	6	
FWD VM BT	7	
FWD EXT RBT	8	
Confirm	9	
Disconnect	# 9	

[114] VM Command DTMF Set		
Item	Default	Parameter : DTMF Signal No. (16 digits max.)
LV-MSG	H	
GETMSG	* H	
AA-SVC	# 8	
VM-SVC	# 6	

[115] Adjust Time		
Default	1 : 00	AM
Change	:	
	(1 – 12) : (00 – 59)	(AM / PM)

[116] ROM Version Display		
Parameter	0 (TD816 or Master)	1 (Slave)
Default	Not Applicable	

117 – 119

[117] Voice Mail Number Assignment		
Item	Default	Parameter: Jack 02 – 16 (TD816) Jack 02 – 64 (TD1232)
Master	Not Stored	
Slave (TD1232 only)	Not Stored	

	[118] Voice Mail Extension Number Assignment			[119] Voice Mail Extension Group Assignment								
	Item : VM No. (01 – 24)	Jack No. : -1 -2	Parameter : Ext. No. (2 – 4 digits)		Parameter : Ext. Group No. (1 – 8)							
Default			Change	Default : all – 1								
					1	2	3	4	5	6	7	8
01	-1	165										
02	-2	166										
03	-1	167										
04	-2	168										
05	-1	169										
06	-2	170										
07	-1	177										
08	-2	178										
09	-1	181										
10	-2	182										
11	-1	183										
12	-2	184										
13	-1	171										
14	-2	172										
15	-1	173										
16	-2	174										
17	-1	175										
18	-2	176										
19	-1	179										
20	-2	180										
21	-1	185										
22	-2	186										
23	-1	187										
24	-2	188										
All VM No.												

<Note> VM No.: TD816 (01 – 12), TD1232 (01 – 24)

[120] User Password				
Default				Parameter : 4 – 7 digits, 0 – 9
1	2	3	4	

[121] Walking COS Password				
Default				Parameter : 4 – 7 digits, 0 – 9
1	2	3	4	

[122] UCD Overflow		
Item : UCD Group No.	Parameter	
	Overflow Extension No. (2 – 4 digits)	Time Table No. (1 – 4)
Default : all	Not Stored	
all UCD groups		
1		
2		
3		
4		
5		
6		
7		
8		

[123] UCD Time Table				
	Sequence			
Table 1	→	→	→	→
Table 2	→	→	→	→
Table 3	→	→	→	→
Table 4	→	→	→	→
Selection : S1 / S2 / S3 / S4 / TR / RT / 1T / 2T / 3T / 4T / Blank				

[125] Area Code Assignment		[126] Caller ID Modification for Local Call	
Item : Location No.	Parameter : 1 – 6 digits, consisting of 0 – 9.	Parameter : No. of digits to be deleted (0 – 9)	Parameter : Number to be added (4 digits max.), consisting of 0 – 9, * and #.
Default : all	Blank	3	Blank
01			
02			
03			
04			
05			
06			
07			
08			
09			
10			

[127] Caller ID Modification for Long Distance Call		
	Parameter : No. of digits to be deleted (0 – 9)	Parameter : Number to be added (4 digits max.), consisting of 0 – 9, * and #.
Default	0	1
Change		

[128] PBX Code	
	Parameter : 1 – 3 digits
Default	Not stored
Change	

[124] Phantom Extension Number Assignment									
Parameter : 2 – 4 digits, consisting of 0 – 9.									
Default : all	Not Stored								
Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter	Item: Location No.	Parameter
001		031		061		091		121	
002		032		062		092		122	
003		033		063		093		123	
004		034		064		094		124	
005		035		065		095		125	
006		036		066		096		126	
007		037		067		097		127	
008		038		068		098		128	
009		039		069		099			
010		040		070		100			
011		041		071		101			
012		042		072		102			
013		043		073		103			
014		044		074		104			
015		045		075		105			
016		046		076		106			
017		047		077		107			
018		048		078		108			
019		049		079		109			
020		050		080		110			
021		051		081		111			
022		052		082		112			
023		053		083		113			
024		054		084		114			
025		055		085		115			
026		056		086		116			
027		057		087		117			
028		058		088		118			
029		059		089		119			
030		060		090		120			

[130] Message Waiting Control	
Item : Unit No.	Parameter : jack number, 02 through 64
Default : all	Not Stored
1	
2	
4	
5	

<Note>

Unit No.:
TD816 (1)
TD1232 (1 and 2/Master,
4 and 5/Slave)
Jack No.:
TD816 (02 – 16)
TD1232 (02 – 32/Master,
33 – 64/Slave)

[131] Message Waiting Lamp Assignment	
Default	Parameter : 1 through 12
1	

[133] Caller ID Extension Assignment	
Item : Unit No.	Port Number 1 or 2
Default : all	Not Stored
1	
2	
3	
4	

<Note>

Unit No.:
TD816 (1)
TD1232 (1 – 4)

[132] Message Waiting Port Set				
Item: Message Waiting Port No.	Unit Number			
	1	2	4	5
	Parameter: Jack Number: 01 through 64 and Sub Port Number 1 or 2			
Default	All message waiting ports: Not Stored			
01				
02				
03				
04				
05				
06				
07				
08				
09				
10				
11				
12				
13				
14				
15				
16				

<Note>

Unit No.:
TD816 (1)
TD1232 (1 and 2/Master,
4 and 5/Slave)

Single Line Telephone Port No.:
TD816 (01 – 16)
TD1232 (01 – 32/Master,
33 – 64/Slave)

[134] Hotel Application		
	Default	Parameter
ON		
OFF	✓	

[135] DID Number Conversion Selection		
	Default	Selection
EXT Number		
Transfer Table	✓	

136 – 139

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
001				
002				
003				
004				
005				
006				
007				
008				
009				
010				
011				
012				
013				
014				
015				
016				
017				
018				
019				
020				
021				
022				
023				
024				
025				

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
026				
027				
028				
029				
030				
031				
032				
033				
034				
035				
036				
037				
038				
039				
040				
041				
042				
043				
044				
045				
046				
047				
048				
049				
050				

136 – 139

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
051				
052				
053				
054				
055				
056				
057				
058				
059				
060				
061				
062				
063				
064				
065				
066				
067				
068				
069				
070				
071				
072				
073				
074				
075				

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
076				
077				
078				
079				
080				
081				
082				
083				
084				
085				
086				
087				
088				
089				
090				
091				
092				
093				
094				
095				
096				
097				
098				
099				
100				

136 – 139

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
101				
102				
103				
104				
105				
106				
107				
108				
109				
110				
111				
112				
113				
114				
115				
116				
117				
118				
119				
120				
121				
122				
123				
124				
125				

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
126				
127				
128				
129				
130				
131				
132				
133				
134				
135				
136				
137				
138				
139				
140				
141				
142				
143				
144				
145				
146				
147				
148				
149				
150				

136 – 139

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
151				
152				
153				
154				
155				
156				
157				
158				
159				
160				
161				
162				
163				
164				
165				
166				
167				
168				
169				
170				
171				
172				
173				
174				
175				

	[136] DID Number Assignment	[137] DID Extension – Day	[138] DID Extension – Night	[139] DID Extension Name Set
Item : Location No.	Parameter: DID Number (16 digits max.)	Parameter: Ext. Number (2-4 digits)		Parameter: Name (10 characters max.)
Default	All : Not Stored			
176				
177				
178				
179				
180				
181				
182				
183				
184				
185				
186				
187				
188				
189				
190				
191				
192				
193				
194				
195				
196				
197				
198				
199				
200				

200 – 208, 211 – 220

	[200] Hold Recall Time	[201] Transfer Recall Time	[202] Call Forwarding – No Answer Time	[203] Intercept Time	[204] Pickup Dial Waiting Time	[205] Extension-to- Outside Line Call Duration Time	[206] Outside-to- Outside Line Call Duration Time
Default	60 s	12 rings	3 rings	12 rings	1 s	10 min	10 min
Parameter							
Selection	0 – 240	0 – 48	1 – 12	3 – 48	1 – 5	1 – 64	1 – 64

	[207] First Digit Time	[208] Inter Digit Time	[211] Dial Start Time	[212] Call Duration Count Start Time	[213]* DISA Delayed Answer Time	[214]* DISA Prolong Time	[216] Message Waiting Ring Interval Time
Default	10 s	10 s	5 (x 100 ms)	0 s	1 ring	3 min	0 min
Parameter							
Selection	5 – 120	5 – 30	0 – 40	0 – 60	0 – 6	0 – 7	0 – 64

	[217] Timed Reminder Alarm Ring Time	[218]* DISA AA Wait Time	[219] Call Park Recall Time	[220] TIE First / Inter Digit Time
Default	30 s	1 s	12 rings	5 s
Parameter				
Selection	30 – 240	1 – 5	0 – 48	3 – 30

	[215]* Outgoing Message Time							
	Default				Selection			
	0	16	32	64	0	16	32	64
OGM 1			✓					
OGM 2	✓							
OGM 3			✓					
OGM 4	✓							
The total time of Outgoing Messages cannot exceed 64 seconds.								

[300] TRS Override for System Speed Dialing		
	Default	Selection
Enable		
Disable	✓	

[311] Special Carrier Access Codes	
Item : Location No.	Parameter : 7 digits max., consisting of 0 – 9, *
Default : all	Not Stored
01	
02	
03	
04	
05	
06	
07	
08	
09	
10	
11	
12	
13	
14	
15	
16	
17	
18	
19	
20	

	[301] TRS Denied Code Entry for Levels 2 – 6	[302] TRS Denied Code Entry for Levels 3 – 6	[303] TRS Denied Code Entry for Levels 4 – 6	[304] TRS Denied Code Entry for Levels 5 – 6	[305] TRS Denied Code Entry for Level 6
Item : Location	Parameter : 10 digits max., consisting of 0 – 9, * .				
Default : all	Not Stored				
01					
02					
03					
04					
05					
06					
07					
08					
09					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					

	[306] TRS Excepted Code Entry for Level 2	[307] TRS Excepted Code Entry for Levels 2 – 3	[308] TRS Excepted Code Entry for Levels 2 – 4	[309] TRS Excepted Code Entry for Levels 2 – 5	[310] TRS Excepted Code Entry for Levels 2 – 6
Item : Location	Parameter : 10 digits max., consisting of 0 – 9, * .				
Default : all	Not Stored				
1					
2					
3					
4					
5					

312, 313, 334

[312] ARS Mode		
	Default	Selection
On		
Off	✓	

[334] Emergency Dial Number Set	
Item : Location No.	Parameter : 24 digits max., consisting of 0 – 9.
Default : 01	911
01	
02	
03	
04	
05	
06	
07	
08	
09	
10	

[313] ARS Time								
	Time A		Time B		Time C		Time D	
	Time	AM/PM	Time	AM/PM	Time	AM/PM	Time	AM/PM
Default:all	8:00	AM	5:00	PM	9:00	PM	Disable	
MON	:		:		:		:	
TUE	:		:		:		:	
WED	:		:		:		:	
THU	:		:		:		:	
FRI	:		:		:		:	
SAT	:		:		:		:	
SUN	:		:		:		:	
All	:		:		:		:	
Selection : Day of the week : MON – SUN : Hour : 1 – 12 : Minute : 00 – 59 : AM / PM : Disable Note : The times must be programmed in sequence from Time-A to Time-D.								

ARS Programming Tables (314, 322, 330, 331)

ARS Programming Table 1 (Plan 1)																	
[314] ARS Leading Digit Entry		[322] ARS Routing Plan 1															
												Parameter : 10 digits max., consisting of 0 – 9, * .					
Default : all		Not Stored								Default Not Stored		Priority 1		Priority 2		Priority 3	
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	G	M	G	M	G	M		
001		026		051		076											
002		027		052		077											
003		028		053		078											
004		029		054		079											
005		030		055		080											
006		031		056		081											
007		032		057		082											
008		033		058		083											
009		034		059		084											
010		035		060		085											
011		036		061		086											
012		037		062		087											
013		038		063		088											
014		039		064		089											
015		040		065		090											
016		041		066		091											
017		042		067		092											
018		043		068		093											
019		044		069		094											
020		045		070		095											
021		046		071		096											
022		047		072		097											
023		048		073		098											
024		049		074		099											
025		050		075		100											
										[330] ARS Modify Removed Digit							
Item : Table 1		Default		Parameter : No. of digits to be deleted (0 – 9)													
		0															
[331] ARS Modify Added Number																	
Item : Table 1		Default is Not Stored.															
		Parameter : 20 digits max.															

ARS Programming Tables (315, 323, 330, 331)

ARS Programming Table 2 (Plan 2)											
	[315] ARS Leading Digit Entry						[323] ARS Routing Plan 2				
	Parameter : 10 digits max., consisting of 0 – 9, * .										
Default : all	Not Stored						Default Not Stored	Priority 1	Priority 2	Priority 3	
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	G	M	G	M
001		026		051		076					
002		027		052		077					
003		028		053		078					
004		029		054		079					
005		030		055		080					
006		031		056		081					
007		032		057		082					
008		033		058		083					
009		034		059		084					
010		035		060		085					
011		036		061		086					
012		037		062		087					
013		038		063		088					
014		039		064		089					
015		040		065		090					
016		041		066		091					
017		042		067		092					
018		043		068		093					
019		044		069		094					
020		045		070		095					
021		046		071		096					
022		047		072		097					
023		048		073		098					
024		049		074		099					
025		050		075		100					
G : Outside Line Group No. (1 – 8) M : Modify No. (1 – 8)											
[330] ARS Modify Removed Digit											
Item :	Default	Parameter : No. of digits to be deleted (0 – 9)									
Table 2	0										
[331] ARS Modify Added Number											
Item :	Default is Not Stored.										
Table 2	Parameter : 20 digits max.										

ARS Programming Tables (316, 324, 330, 331)

ARS Programming Table 3 (Plan 3)															
	[316] ARS Leading Digit Entry						[324] ARS Routing Plan 3								
	Parameter : 10 digits max., consisting of 0 – 9, * .						Default Not Stored		Priority 1		Priority 2		Priority 3		
Default : all	Not Stored														
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	G		M		G		M	
001		026		051		076									
002		027		052		077		Time-A							
003		028		053		078		Time-B							
004		029		054		079		Time-C							
005		030		055		080		Time-D							
006		031		056		081									
007		032		057		082									
008		033		058		083									
009		034		059		084									
010		035		060		085									
011		036		061		086									
012		037		062		087									
013		038		063		088									
014		039		064		089									
015		040		065		090									
016		041		066		091									
017		042		067		092									
018		043		068		093									
019		044		069		094									
020		045		070		095									
021		046		071		096									
022		047		072		097									
023		048		073		098									
024		049		074		099									
025		050		075		100									
								[330] ARS Modify Removed Digit							
Item : Table 3	Default	Parameter : No. of digits to be deleted (0 – 9)													
	0														
								[331] ARS Modify Added Number							
Item : Table 3	Default is Not Stored.														
	Parameter : 20 digits max.														

ARS Programming Tables (317, 325, 330, 331)

ARS Programming Table 4 (Plan 4)													
	[317] ARS Leading Digit Entry						[325] ARS Routing Plan 4						
	Parameter : 10 digits max., consisting of 0 – 9, * .												
Default : all	Not Stored						Default Not Stored	Priority 1		Priority 2		Priority 3	
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location		Parameter	G	M	G	M	G
001		026		051		076							
002		027		052		077							
003		028		053		078							
004		029		054		079							
005		030		055		080							
006		031		056		081							
007		032		057		082							
008		033		058		083							
009		034		059		084							
010		035		060		085							
011		036		061		086							
012		037		062		087							
013		038		063		088							
014		039		064		089							
015		040		065		090							
016		041		066		091							
017		042		067		092							
018		043		068		093							
019		044		069		094							
020		045		070		095							
021		046		071		096							
022		047		072		097							
023		048		073		098							
024		049		074		099							
025		050		075		100							
								G : Outside Line Group No. (1 – 8) M : Modify No. (1 – 8)					
								[330] ARS Modify Removed Digit					
		Item :		Default		Parameter : No. of digits to be deleted (0 – 9)							
		Table 4		0									
								[331] ARS Modify Added Number					
		Item :		Default is Not Stored.									
		Table 4		Parameter : 20 digits max.									

ARS Programming Tables (318, 326, 330, 331)

ARS Programming Table 5 (Plan 5)															
	[318] ARS Leading Digit Entry							[326] ARS Routing Plan 5							
	Parameter : 10 digits max., consisting of 0 – 9, * .							Default		Priority 1		Priority 2		Priority 3	
Default : all	Not Stored							Not Stored		G	M	G	M	G	M
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter								
001		026		051		076									
002		027		052		077		Time-A							
003		028		053		078		Time-B							
004		029		054		079		Time-C							
005		030		055		080		Time-D							
006		031		056		081		G : Outside Line Group No. (1 – 8) M : Modify No. (1 – 8)							
007		032		057		082									
008		033		058		083									
009		034		059		084									
010		035		060		085		[330] ARS Modify Removed Digit							
011		036		061		086		Item : Table 5		Default	Parameter : No. of digits to be deleted (0 – 9)				
012		037		062		087				0					
013		038		063		088		[331] ARS Modify Added Number							
014		039		064		089		Item : Table 5		Default is Not Stored.					
015		040		065		090				Parameter : 20 digits max.					
016		041		066		091									
017		042		067		092									
018		043		068		093									
019		044		069		094									
020		045		070		095									
021		046		071		096									
022		047		072		097									
023		048		073		098									
024		049		074		099									
025		050		075		100									

ARS Programming Tables (319, 327, 330, 331)

ARS Programming Table 6 (Plan 6)													
	[319] ARS Leading Digit Entry						[327] ARS Routing Plan 6						
	Parameter : 10 digits max., consisting of 0 – 9, * .												
Default : all	Not Stored						Default Not Stored	Priority 1		Priority 2		Priority 3	
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location		Parameter	G	M	G	M	G
001		026		051		076							
002		027		052		077							
003		028		053		078							
004		029		054		079							
005		030		055		080							
006		031		056		081							
007		032		057		082							
008		033		058		083							
009		034		059		084							
010		035		060		085							
011		036		061		086							
012		037		062		087							
013		038		063		088							
014		039		064		089							
015		040		065		090							
016		041		066		091							
017		042		067		092							
018		043		068		093							
019		044		069		094							
020		045		070		095							
021		046		071		096							
022		047		072		097							
023		048		073		098							
024		049		074		099							
025		050		075		100							
								G : Outside Line Group No. (1 – 8) M : Modify No. (1 – 8)					
								[330] ARS Modify Removed Digit					
		Item :		Default		Parameter : No. of digits to be deleted (0 – 9)							
		Table 6		0									
								[331] ARS Modify Added Number					
		Item :		Default is Not Stored.									
		Table 6		Parameter : 20 digits max.									

ARS Programming Tables (320, 328, 330, 331)

ARS Programming Table 7 (Plan 7)													
	[320] ARS Leading Digit Entry						[328] ARS Routing Plan 7						
	Parameter : 10 digits max., consisting of 0 – 9, * .												
Default : all	Not Stored						Default Not Stored	Priority 1		Priority 2		Priority 3	
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location		Parameter	G	M	G	M	G
001		026		051		076							
002		027		052		077							
003		028		053		078							
004		029		054		079							
005		030		055		080							
006		031		056		081							
007		032		057		082							
008		033		058		083							
009		034		059		084							
010		035		060		085							
011		036		061		086							
012		037		062		087							
013		038		063		088							
014		039		064		089							
015		040		065		090							
016		041		066		091							
017		042		067		092							
018		043		068		093							
019		044		069		094							
020		045		070		095							
021		046		071		096							
022		047		072		097							
023		048		073		098							
024		049		074		099							
025		050		075		100							
								G : Outside Line Group No. (1 – 8) M : Modify No. (1 – 8)					
								[330] ARS Modify Removed Digit					
								Item :	Default	Parameter : No. of digits to be deleted (0 – 9)			
								Table 7	0				
								[331] ARS Modify Added Number					
								Item :	Default is Not Stored.				
								Table 7	Parameter : 20 digits max.				

ARS Programming Tables (321, 329, 330, 331)

ARS Programming Table 8 (Plan 8)													
	[321] ARS Leading Digit Entry						[329] ARS Routing Plan 8						
	Parameter : 10 digits max., consisting of 0 – 9, * .						Default Not Stored		Priority 1		Priority 2		Priority 3
Default : all	Not Stored												
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	G		M		M	
001		026		051		076							
002		027		052		077							
003		028		053		078							
004		029		054		079							
005		030		055		080							
006		031		056		081							
007		032		057		082							
008		033		058		083							
009		034		059		084							
010		035		060		085							
011		036		061		086							
012		037		062		087							
013		038		063		088							
014		039		064		089							
015		040		065		090							
016		041		066		091							
017		042		067		092							
018		043		068		093							
019		044		069		094							
020		045		070		095							
021		046		071		096							
022		047		072		097							
023		048		073		098							
024		049		074		099							
025		050		075		100							
[330] ARS Modify Removed Digit													
Item :	Default		Parameter : No. of digits to be deleted (0 – 9)										
Table 8	0												
[331] ARS Modify Added Number													
Item :	Default is Not Stored.												
Table 8	Parameter : 20 digits max.												

[332] Extra Entry Table Selection		
	Selection : Deny / Except	Level 1 digit, consisting of 2-6
Default	Except	2
Change		

[333] TRS Entry Code Assignment for Extra Table							
Parameter : 10 digits max., consisting of 0 – 9, * .							
Default : all		Not Stored					
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter
001		031		061		091	
002		032		062		092	
003		033		063		093	
004		034		064		094	
005		035		065		095	
006		036		066		096	
007		037		067		097	
008		038		068		098	
009		039		069		099	
010		040		070		100	
011		041		071		101	
012		042		072		102	
013		043		073		103	
014		044		074		104	
015		045		075		105	
016		046		076		106	
017		047		077		107	
018		048		078		108	
019		049		079		109	
020		050		080		110	
021		051		081		111	
022		052		082		112	
023		053		083		113	
024		054		084		114	
025		055		085		115	
026		056		086		116	
027		057		087		117	
028		058		088		118	
029		059		089		119	
030		060		090		120	

[333] TRS Entry Code Assignment for Extra Table									
Parameter : 10 digits max., consisting of 0 – 9, * .									
Default : all	Not Stored								
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter
121		151		181		211		241	
122		152		182		212		242	
123		153		183		213		243	
124		154		184		214		244	
125		155		185		215		245	
126		156		186		216		246	
127		157		187		217		247	
128		158		188		218		248	
129		159		189		219		249	
130		160		190		220		250	
131		161		191		221		251	
132		162		192		222		252	
133		163		193		223		253	
134		164		194		224		254	
135		165		195		225		255	
136		166		196		226		256	
137		167		197		227		257	
138		168		198		228		258	
139		169		199		229		259	
140		170		200		230		260	
141		171		201		231		261	
142		172		202		232		262	
143		173		203		233		263	
144		174		204		234		264	
145		175		205		235		265	
146		176		206		236		266	
147		177		207		237		267	
148		178		208		238		268	
149		179		209		239		269	
150		180		210		240		270	

[333] TRS Entry Code Assignment for Extra Table									
Parameter : 10 digits max., consisting of 0 – 9, * .									
Default : all	Not Stored								
Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter	Item: Location	Parameter
271		301		331		361		391	
272		302		332		362		392	
273		303		333		363		393	
274		304		334		364		394	
275		305		335		365		395	
276		306		336		366		396	
277		307		337		367		397	
278		308		338		368		398	
279		309		339		369		399	
280		310		340		370		400	
281		311		341		371			
282		312		342		372			
283		313		343		373			
284		314		344		374			
285		315		345		375			
286		316		346		376			
287		317		347		377			
288		318		348		378			
289		319		349		379			
290		320		350		380			
291		321		351		381			
292		322		352		382			
293		323		353		383			
294		324		354		384			
295		325		355		385			
296		326		356		386			
297		327		357		387			
298		328		358		388			
299		329		359		389			
300		330		360		390			

340, 341

Item : Location No.	[340] TIE Line Routing Table		[341] TIE Modify Removed / Added Digit	
	Parameter : TIE line access code (3 digits max.), consisting of 0 – 9, *.	Parameter : Outside line group hunt sequence no. (1 – 8), 5 entries max., consisting of 0 – 9, *.	Parameter : No. of digits to be deleted (0 – 4)	Parameter : No. to be added (4 digits max.), consisting of 0 – 9.
Default: all	Not Stored	Not Stored	0	Not Stored
all locations				
1				
2				
3				
4				
5				
6				
7				
8				
9				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				

Item :	[400] Outside Line Connection Assignment		[401] Outside Line Group Assignment		[402] Dial Mode Selection			[403] Pulse Speed Selection		[404] DTMF Time		[405] CPC Signal Detection Incoming Set						[406] Caller ID Assignment		
	Selection		Parameter: Outside Line Group No. (1 – 8)		Selection			Selection		Selection		Selection (ms)						Selection		
	Connect	No Connect	Default	Change	DTMF	Pulse	C.Block	10pps	20pps	80ms	160ms	Disable	100	200	300	400	500	600	Enable	Disable
Default : all	✓		Default	Change	✓			✓		✓						✓				✓
all Outside Lines			—																	
01			1																	
02			2																	
03			3																	
04			4																	
05			5																	
06			6																	
07			7																	
08			8																	
09			8																	
10			8																	
11			8																	
12			8																	
13			8																	
14			8																	
15			8																	
16			8																	
17			8																	
18			8																	
19			8																	
20			8																	
21			8																	
22			8																	
23			8																	
24			8																	

Note: Outside Line No. — TD816 (01 – 08), TD1232 (01 – 24)

400, 401

	[400] Outside Line Connection Assignment		[401] Outside Line Group Assignment	
	Selection		Parameter: Outside Line Group No. (1 – 8)	
Item : Outside Line No.	Connect	No Connect	Default	Change
Default : all	✓		Default	Change
all Outside Lines			8	
25			8	
26			8	
27			8	
28			8	
29			8	
30			8	
31			8	
32			8	
33			8	
34			8	
35			8	
36			8	
37			8	
38			8	
39			8	
40			8	
41			8	
42			8	
43			8	
44			8	
45			8	
46			8	
47			8	
48			8	

Note: Outside Line No. — TD1232 (24 – 47 for PRI, 24 – 48 for T1)

Item :	[407] DIL 1 : 1 Extension — Day		[408] DIL 1 : 1 Extension — Night		[415]CPC Signal Detection Outgoing Set		[416] Reverse Circuit Assignment	
	Parameter : Disable/Extension No. (2 – 4 digits)				Selection		Selection	
Outside Line No.	Disable	Extension No.	Disable	Extension No.	Enable	Disable	Regular	Reverse
Default : all	✓		✓			✓	✓	
all Outside Lines								
01								
02								
03								
04								
05								
06								
07								
08								
09								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								

Note: Outside Line No. — TD816 (01 – 08), TD1232 (01 – 24)

409 – 414

Item : Outside Line Group No.	[409] Intercept Extension — Day		[410] Intercept Extension — Night		[411] Host PBX Access Codes	[412] Pause Time						
	Parameter : Disable/Extension No. (2 – 4 digits)				Parameter : Access Code (1 or 2 digits, four different entries max.)	Selection : Time (s)						
Default : all	Disable	Extension No	Disable	Extension No.	Default is Not Stored.				1.5	2.5	3.5	4.5
all Groups	✓		✓									
1												
2												
3												
4												
5												
6												
7												
8												

Item : Outside Line Group No.	[413] Flash Time															[414] Disconnect Time	
	Selection: Time (ms)															Selection: Time (s)	
Default : all	Disable	80	96	112	200	300	400	500	600	700	800	900	1000	1100	1200	1.5	4.0
all Groups									✓							✓	
1																	
2																	
3																	
4																	
5																	
6																	
7																	
8																	

	[417] Outside Line Name Assignment	[419] ISDN Outgoing CLIR Service Assignment		[420] ISDN Ring Service Assignment	
Item : Outside Line No.	Parameter : Name (10 characters max.)	Selection		Selection	
Default : all	Not Stored	Enable	Disable	ISDN	Regular
all Outside Lines			✓		✓
01					
02					
03					
04					
05					
06					
07					
08					
09					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					

Note: [417] Outside Line No. — TD816 (01 – 08), TD1232 (01 – 12 for Master, 13 – 24 for Slave)

417 – 418

	[417] Outside Line Name Assignment	[418]* Outside Line Number Assignment for PRI CLIP
Item : Outside Line No.	Parameter : Name (10 characters max.)	Parameter : Telephone No. (16 digits max.)
Default : all	Not Stored	Not Stored
all Outside Lines		
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		
48		

Note: Outside Line No. — TD1232 (01 – 12 for Master, 13 – 24 for Slave, [25 – 47 for PRI ISDN, 25 – 48 for T1])

	[423] ISDN Port Type		[424] ISDN Layer 1 Active Mode		[425] ISDN Configuration		[426] ISDN Data Link Mode		[427] ISDN TEI Mode		[428] ISDN Extension Directory Number		[429] ISDN Extension Progress Tone	
	Selection		Selection		Selection		Selection		Selection		Selection		Selection	
Item: ISDN Port No.	CO	Extension	Permanent	Call	Point	Multipoint	Permanent	Call	Fix 0 - 63	Automatic	Enable	Disable	Enable	Disable
Default: all	✓		✓			✓	✓			✓		✓		✓
All ports														
01														
02														
03														
04														
05														
06														
07														
08														
09														
10														
11														
12														

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

	[430] DID / TIE Format Number Assignment
Item : Outside Line Group No.	Parameter: DID Format No. (1 – 4)
Default : all	Not Stored
all groups	
1	
2	
3	
4	
5	
6	
7	
8	

	[431] DID / TIE Incoming Assignment		[432] DID / TIE Outgoing Assignment	
Item : DID / TIE Format No.	Selection		Selection	
	Immediate	Wink	Immediate	Wink
Default : all		✓		✓
all DID / TIE formats				
1				
2				
3				
4				
5				
6				
7				
8				

	[433] DID / TIE Subscriber Number Removed Digit	[434] DID / TIE Added Number	[435] DID / TIE Wink Time Out Assignment
Item : DID / TIE Format No.	Parameter : No. of digits to be deleted (0 – 6)	Parameter : No. to be added (4 digits max.), consisting of 0 – 9.	Selection: 1 – 127 (× 64 ms)
Default : all	Default : all – 0	Blank	16
all DID / TIE formats			
1			
2			
3			
4			
5			
6			
7			
8			

Item : Outside Line Group No.	[436] CO-to-TIE Transfer		[437] TIE-to-CO Transfer		[438] TIE-to-TIE Transfer	
	Selection		Selection		Selection	
	Enable	Disable	Enable	Disable	Enable	Disable
Default : all		✓		✓	✓	
all outside line groups						
1						
2						
3						
4						
5						
6						
7						
8						

Item : Outside Line Group No.	[439] TIE Security Type		[440] Line Hunting Sequence	
	Selection		Selection	
	Non	Trunk	Small→Large	Large→Small
Default : all	✓			✓
all outside line groups				
1				
2				
3				
4				
5				
6				
7				
8				

453 – 456

		[453]	[454]	[455]			[456]		
		SPID Assignment	DN Assignment	Extension Ringing Assignment – Day for ISDN			Extension Ringing Assignment – Night for ISDN		
Item		Parameter : SPID (20 digits max.)	Parameter : DN (20 digits max.)	Extension No. (2-4 digits)	Operator	Disable	Extension No. (2-4 digits)	Operator	Disable
ISDN Port No.	Location No.								
Default : all		Not Stored	Not Stored			✓			✓
01	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
02	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
03	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

		[453]	[454]	[455]			[456]		
		SPID Assignment	DN Assignment	Extension Ringing Assignment – Day for ISDN			Extension Ringing Assignment – Night for ISDN		
Item		Parameter : SPID (20 digits max.)	Parameter : DN (20 digits max.)	Extension No. (2-4 digits)	Operator	Disable	Extension No. (2-4 digits)	Operator	Disable
ISDN Port No.	Location No.								
Default : all		Not Stored	Not Stored			✓			✓
04	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
05	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
06	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

453 – 456

		[453]	[454]	[455]			[456]		
		SPID Assignment	DN Assignment	Extension Ringing Assignment – Day for ISDN			Extension Ringing Assignment – Night for ISDN		
Item		Parameter : SPID (20 digits max.)	Parameter : DN (20 digits max.)	Extension No. (2-4 digits)	Operator	Disable	Extension No. (2-4 digits)	Operator	Disable
ISDN Port No.	Location No.								
Default : all		Not Stored	Not Stored			✓			✓
07	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
08	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
09	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

		[453]	[454]	[455]			[456]		
		SPID Assignment	DN Assignment	Extension Ringing Assignment – Day for ISDN			Extension Ringing Assignment – Night for ISDN		
Item		Parameter : SPID (20 digits max.)	Parameter : DN (20 digits max.)	Extension No. (2-4 digits)	Operator	Disable	Extension No. (2-4 digits)	Operator	Disable
ISDN Port No.	Location No.								
Default : all		Not Stored	Not Stored			✓			✓
10	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
11	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								
12	-1								
	-2								
	-3								
	-4								
	-5								
	-6								
	-7								
	-8								

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

457 – 458, 467 – 468

	[457] DIL 1:1 – Lunch Group	[458] DIL 1:1 – Break Group	[467] DIL 1:1 – Extension – Lunch		[468] DIL 1:1 – Extension – Break	
Item : Outside line no.	Group no. : 1 – 8		Parameter : Disable/Extension No. (2 – 4 digits)		Parameter : Disable/Extension No. (2 – 4 digits)	
			Disable	Extension No.	Disable	Extension No.
Default: all	Blank		✓		✓	
01						
02						
03						
04						
05						
06						
07						
08						
09						
10						
11						
12						
13						
14						
15						
16						
17						
18						
19						
20						
21						
22						
23						
24						

Note: Outside Line No. — TD816 (01 – 08), TD1232 (01 – 12 for Master, 13 – 24 for Slave)

	[460]* PRI Connection Assignment	[461]* PRI Line Coding Assignment		[462]* PRI Frame Sequence Assignment			
	B Channel No. (0 - 23)	Selection		Selection			
		B8ZS	AMI	ESF	F4	F12	F72
Default	0	✓		✓			
Change							

	[464]* PRI Inter Digit Timer 1 Assignment	[465]* PRI Inter Digit Timer 2 Assignment	[466]* PRI Dial Counter for Inter Digit Timer 2 Assignment
	Parameter : Time (1 - 30)	Parameter : Time (1 - 30)	Parameter : Digit No. (0 - 24)
Default	5 s	3 s	7 digits
Change			

	[463]* PRI Timer 1 and Timer 2 Assignment	
Item : Outside	Selection	
Line No.	Effective	Not Effective
Default: all	✓	
25		
26		
27		
28		
29		
30		
31		
32		
33		
34		
35		
36		
37		
38		
39		
40		
41		
42		
43		
44		
45		
46		
47		

Item : COS No.	[500] Toll Restriction Level — Day																[501] Toll Restriction Level — Night															
	Default: Level								Change: Level								Default: Level								Change: Level							
	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8
all COSs																																
1	✓															✓																
2	✓															✓																
3	✓															✓																
4	✓															✓																
5	✓															✓																
6	✓															✓																
7	✓															✓																
8						✓																✓										

Item : COS No.	[502] Extension-to-Outside Line Call Duration Limit		[503] Call Transfer to Outside Line		[504] Call Forwarding to Outside Line		[505] Executive Busy Override		[506] Executive Busy Override Deny		[507] Do Not Disturb Override	
	Selection		Selection		Selection		Selection		Selection		Selection	
	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable	Enable	Disable
Default: all		✓		✓		✓		✓	✓			✓
all COSs												
1												
2												
3												
4												
5												
6												
7												
8												

508 – 511, 624

Item : COS No.	[508] Account Code Entry Mode			[509] Off-Hook Call Announcement (OHCA)		[510] Night Service Access		[511] PITS Programming Level	
	Option	Verify-All	Verify-Toll	Enable	Disable	Enable	Disable	LVL 1	LVL 2
Default: all	✓			✓			✓	✓	
all COSs									
1									
2									
3									
4									
5									
6									
7									
8									

Item: Port No. (07 - 12)	[624]* ISDN Extension CLIP Number Assignment
	Default : all – Not Stored
	Change
07	
08	
09	
10	
11	
12	

Item : Jack No. (01 – 32)	[600] EXtra Device Port		[610] Live Call Screening Recording Mode Assignment	
	Selection		Selection	
	Enable	Disable	Stop Rec	Keep Rec
Default : all		✓	✓	
01				
02				
03				
04				
05				
06				
07				
08				
09				
10				
11				
12				
13				
14				
15				
16				
17				
18				
19				
20				
21				
22				
23				
24				
25				
26				
27				
28				
29				
30				
31				
32				

Item : Jack No. (33 – 64)	[600] EXtra Device Port		[610] Live Call Screening Recording Mode Assignment	
	Selection		Selection	
	Enable	Disable	Stop Rec	Keep Rec
Default : all		✓	✓	
33				
34				
35				
36				
37				
38				
39				
40				
41				
42				
43				
44				
45				
46				
47				
48				
49				
50				
51				
52				
53				
54				
55				
56				
57				
58				
59				
60				
61				
62				
63				
64				

<Note>

Jack No.: TD816 (01 – 16)

TD1232 (01 – 64)

003, 004, 601, 602, 622

Item : Jack No. (01 – 16)-1 -2	[003] Extension Number Set		[004] Extension Name Set	[601] Class of Service	[602] Extension Group Assignment	[622] * Extension CLIP Number Assignment
	Parameter : Ext. No. (2 – 4 digits)	Parameter : Name (10 characters max.)	Parameter : COS No. (1 – 8)	Parameter : Ext. Group No. (1 – 8)	Parameter : CLIP No. (max. 16 digits)	
Default	Change	Default : all – Not Stored Change	Default : all – COS 1 Change	Default : all – 1 Change	Default : all – Not Stored Change	
01-1	101					
01-2	201					
02-1	102					
02-2	202					
03-1	103					
03-2	203					
04-1	104					
04-2	204					
05-1	105					
05-2	205					
06-1	106					
06-2	206					
07-1	107					
07-2	207					
08-1	108					
08-2	208					
09-1	109					
09-2	209					
10-1	110					
10-2	210					
11-1	111					
11-2	211					
12-1	112					
12-2	212					
13-1	113					
13-2	213					
14-1	114					
14-2	214					
15-1	115					
15-2	215					
16-1	116					
16-2	216					

<Note>

Jack No.:

TD816 (01(-1/-2) – 16 (-1/-2))

TD1232 (01(-1/-2) – 64 (-1/-2))

Item : Jack No. (01 – 16)-1 -2	[003] Extension Number Set		[004] Extension Name Set	[601] Class of Service	[602] Extension Group Assignment	[622] * Extension CLIP Number Assignment
	Parameter : Ext. No. (2 – 4 digits)		Parameter : Name (10 characters max.)	Parameter : COS No. (1 – 8)	Parameter : Ext. Group No. (1 – 8)	Parameter : CLIP No. (max. 16 digits)
	Default	Change	Default : all – Not Stored Change	Default : all – COS 1 Change	Default : all – 1 Change	Default : all – Not Stored Change
17-1	117					
17-2	217					
18-1	118					
18-2	218					
19-1	119					
19-2	219					
20-1	120					
20-2	220					
21-1	121					
21-2	221					
22-1	122					
22-2	222					
23-1	123					
23-2	223					
24-1	124					
24-2	224					
25-1	125					
25-2	225					
26-1	126					
26-2	226					
27-1	127					
27-2	227					
28-1	128					
28-2	228					
29-1	129					
29-2	229					
30-1	130					
30-2	230					
31-1	131					
31-2	231					
32-1	132					
32-2	232					

<Note>

Jack No.:

TD816 (01(-1/-2) – 16 (-1/-2))

TD1232 (01(-1/-2) – 64 (-1/-2))

003, 004, 601, 602, 622

Item : Jack No. (01 – 16)-1 -2	[003] Extension Number Set		[004] Extension Name Set	[601] Class of Service	[602] Extension Group Assignment	[622] * Extension CLIP Number Assignment
	Parameter : Ext. No. (2 – 4 digits)		Parameter : Name (10 characters max.)	Parameter : COS No. (1 – 8)	Parameter : Ext. Group No. (1 – 8)	Parameter : CLIP No. (max. 16 digits)
	Default	Change	Default : all – Not Stored Change	Default : all – COS 1 Change	Default : all – 1 Change	Default : all – Not Stored Change
33-1	133					
33-2	233					
34-1	134					
34-2	234					
35-1	135					
35-2	235					
36-1	136					
36-2	236					
37-1	137					
37-2	237					
38-1	138					
38-2	238					
39-1	139					
39-2	239					
40-1	140					
40-2	240					
41-1	141					
41-2	241					
42-1	142					
42-2	242					
43-1	143					
43-2	243					
44-1	144					
44-2	244					
45-1	145					
45-2	245					
46-1	146					
46-2	246					
47-1	147					
47-2	247					
48-1	148					
48-2	248					

<Note>

Jack No.:

TD816 (01(-1/-2) – 16 (-1/-2))

TD1232 (01(-1/-2) – 64 (-1/-2))

	[003] Extension Number Set		[004] Extension Name Set	[601] Class of Service	[602] Extension Group Assignment	[622] * Extension CLIP Number Assignment
Item : Jack No. (01 – 16)-1 -2	Parameter : Ext. No. (2 – 4 digits)		Parameter : Name (10 characters max.)	Parameter : COS No. (1 – 8)	Parameter : Ext. Group No. (1 – 8)	Parameter : CLIP No. (max. 16 digits)
	Default	Change	Default : all – Not Stored Change	Default : all – COS 1 Change	Default : all – 1 Change	Default : all – Not Stored Change
49-1	149					
49-2	249					
50-1	150					
50-2	250					
51-1	151					
51-2	251					
52-1	152					
52-2	252					
53-1	153					
53-2	253					
54-1	154					
54-2	254					
55-1	155					
55-2	255					
56-1	156					
56-2	256					
57-1	157					
57-2	257					
58-1	158					
58-2	258					
59-1	159					
59-2	259					
60-1	160					
60-2	260					
61-1	161					
61-2	262					
62-1	162					
62-2	262					
63-1	163					
63-2	263					
64-1	164					
64-2	264					

<Note>

Jack No.:

TD816 (01(-1/-2) – 16 (-1/-2))

TD1232 (01(-1/-2) – 64 (-1/-2))

[603] DIL 1 : N Extension and Delayed Ringing – Day																<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																
Parameter Item	Outside Line 01					Outside Line 02					Outside Line 03					Outside Line 04					Outside Line 05					Outside Line 06					Outside Line 07					Outside Line 08												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 01 – 1																																																
01 – 2																																																
02 – 1																																																
02 – 2																																																
03 – 1																																																
03 – 2																																																
04 – 1																																																
04 – 2																																																
05 – 1																																																
05 – 2																																																
06 – 1																																																
06 – 2																																																
07 – 1																																																
07 – 2																																																
08 – 1																																																
08 – 2																																																
09 – 1																																																
09 – 2																																																
10 – 1																																																
10 – 2																																																
11 – 1																																																
11 – 2																																																
12 – 1																																																
12 – 2																																																
13 – 1																																																
13 – 2																																																
14 – 1																																																
14 – 2																																																
15 – 1																																																
15 – 2																																																
16 – 1																																																
16 – 2																																																

[603] DIL 1 : N Extension and Delayed Ringing – Day																	<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																															
Parameter Item	Outside Line 09					Outside Line 10					Outside Line 11					Outside Line 12					Outside Line 13					Outside Line 14					Outside Line 15					Outside Line 16												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 01 – 1																																																
01 – 2																																																
02 – 1																																																
02 – 2																																																
03 – 1																																																
03 – 2																																																
04 – 1																																																
04 – 2																																																
05 – 1																																																
05 – 2																																																
06 – 1																																																
06 – 2																																																
07 – 1																																																
07 – 2																																																
08 – 1																																																
08 – 2																																																
09 – 1																																																
09 – 2																																																
10 – 1																																																
10 – 2																																																
11 – 1																																																
11 – 2																																																
12 – 1																																																
12 – 2																																																
13 – 1																																																
13 – 2																																																
14 – 1																																																
14 – 2																																																
15 – 1																																																
15 – 2																																																
16 – 1																																																
16 – 2																																																

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[603] DIL 1 : N Extension and Delayed Ringing – Day																	<Note> D : Disable, I : Immediate, 1 : 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																															
Parameter Item	Outside Line 17					Outside Line 18					Outside Line 19					Outside Line 20					Outside Line 21					Outside Line 22					Outside Line 23					Outside Line 24												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 01 – 1																																																
01 – 2																																																
02 – 1																																																
02 – 2																																																
03 – 1																																																
03 – 2																																																
04 – 1																																																
04 – 2																																																
05 – 1																																																
05 – 2																																																
06 – 1																																																
06 – 2																																																
07 – 1																																																
07 – 2																																																
08 – 1																																																
08 – 2																																																
09 – 1																																																
09 – 2																																																
10 – 1																																																
10 – 2																																																
11 – 1																																																
11 – 2																																																
12 – 1																																																
12 – 2																																																
13 – 1																																																
13 – 2																																																
14 – 1																																																
14 – 2																																																
15 – 1																																																
15 – 2																																																
16 – 1																																																
16 – 2																																																

[603] DIL 1 : N Extension and Delayed Ringing – Day																	<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																															
Parameter Item	Outside Line 01					Outside Line 02					Outside Line 03					Outside Line 04					Outside Line 05					Outside Line 06					Outside Line 07					Outside Line 08												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 17 – 1																																																
17 – 2																																																
18 – 1																																																
18 – 2																																																
19 – 1																																																
19 – 2																																																
20 – 1																																																
20 – 2																																																
21 – 1																																																
21 – 2																																																
22 – 1																																																
22 – 2																																																
23 – 1																																																
23 – 2																																																
24 – 1																																																
24 – 2																																																
25 – 1																																																
25 – 2																																																
26 – 1																																																
26 – 2																																																
27 – 1																																																
27 – 2																																																
28 – 1																																																
28 – 2																																																
29 – 1																																																
29 – 2																																																
30 – 1																																																
30 – 2																																																
31 – 1																																																
31 – 2																																																
32 – 1																																																
32 – 2																																																

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[603] DIL 1 : N Extension and Delayed Ringing – Day		<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																														
Parameter Item	Outside Line 17					Outside Line 18					Outside Line 19					Outside Line 20					Outside Line 21					Outside Line 22					Outside Line 23					Outside Line 24												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 17 – 1																																																
17 – 2																																																
18 – 1																																																
18 – 2																																																
19 – 1																																																
19 – 2																																																
20 – 1																																																
20 – 2																																																
21 – 1																																																
21 – 2																																																
22 – 1																																																
22 – 2																																																
23 – 1																																																
23 – 2																																																
24 – 1																																																
24 – 2																																																
25 – 1																																																
25 – 2																																																
26 – 1																																																
26 – 2																																																
27 – 1																																																
27 – 2																																																
28 – 1																																																
28 – 2																																																
29 – 1																																																
29 – 2																																																
30 – 1																																																
30 – 2																																																
31 – 1																																																
31 – 2																																																
32 – 1																																																
32 – 2																																																

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[603] DIL 1 : N Extension and Delayed Ringing – Day		<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																																				
Parameter Item	Outside Line 01					Outside Line 02					Outside Line 03					Outside Line 04					Outside Line 05					Outside Line 06					Outside Line 07					Outside Line 08																		
	Selection																																																					
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N						
Default : all	✓						✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																						
Jack 33 – 1																																																						
33 – 2																																																						
34 – 1																																																						
34 – 2																																																						
35 – 1																																																						
35 – 2																																																						
36 – 1																																																						
36 – 2																																																						
37 – 1																																																						
37 – 2																																																						
38 – 1																																																						
38 – 2																																																						
39 – 1																																																						
39 – 2																																																						
40 – 1																																																						
40 – 2																																																						
41 – 1																																																						
41 – 2																																																						
42 – 1																																																						
42 – 2																																																						
43 – 1																																																						
43 – 2																																																						
44 – 1																																																						
44 – 2																																																						
45 – 1																																																						
45 – 2																																																						
46 – 1																																																						
46 – 2																																																						
47 – 1																																																						
47 – 2																																																						
48 – 1																																																						
48 – 2																																																						

[603] DIL 1 : N Extension and Delayed Ringing – Day																	<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																															
Parameter Item	Outside Line 09					Outside Line 10					Outside Line 11					Outside Line 12					Outside Line 13					Outside Line 14					Outside Line 15					Outside Line 16												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 33 – 1																																																
33 – 2																																																
34 – 1																																																
34 – 2																																																
35 – 1																																																
35 – 2																																																
36 – 1																																																
36 – 2																																																
37 – 1																																																
37 – 2																																																
38 – 1																																																
38 – 2																																																
39 – 1																																																
39 – 2																																																
40 – 1																																																
40 – 2																																																
41 – 1																																																
41 – 2																																																
42 – 1																																																
42 – 2																																																
43 – 1																																																
43 – 2																																																
44 – 1																																																
44 – 2																																																
45 – 1																																																
45 – 2																																																
46 – 1																																																
46 – 2																																																
47 – 1																																																
47 – 2																																																
48 – 1																																																
48 – 2																																																

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[603] DIL 1 : N Extension and Delayed Ringing – Day															<Note> D : Disable, I : Immediate, 1 : 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																
Parameter Item	Outside Line 17					Outside Line 18					Outside Line 19					Outside Line 20					Outside Line 21					Outside Line 22					Outside Line 23					Outside Line 24											
	Selection																																														
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6
Default : all	✓					✓					✓					✓					✓					✓					✓					✓					✓						
all Jacks																																															
Jack 33 – 1																																															
33 – 2																																															
34 – 1																																															
34 – 2																																															
35 – 1																																															
35 – 2																																															
36 – 1																																															
36 – 2																																															
37 – 1																																															
37 – 2																																															
38 – 1																																															
38 – 2																																															
39 – 1																																															
39 – 2																																															
40 – 1																																															
40 – 2																																															
41 – 1																																															
41 – 2																																															
42 – 1																																															
42 – 2																																															
43 – 1																																															
43 – 2																																															
44 – 1																																															
44 – 2																																															
45 – 1																																															
45 – 2																																															
46 – 1																																															
46 – 2																																															
47 – 1																																															
47 – 2																																															
48 – 1																																															
48 – 2																																															

[603] DIL 1 : N Extension and Delayed Ringing – Day																<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																		
Parameter Item	Outside Line 01					Outside Line 02					Outside Line 03					Outside Line 04					Outside Line 05					Outside Line 06					Outside Line 07					Outside Line 08														
	Selection																																																	
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N		
Default : all	✓					✓					✓					✓					✓					✓					✓					✓					✓					✓				
all Jacks																																																		
Jack 49 – 1																																																		
49 – 2																																																		
50 – 1																																																		
50 – 2																																																		
51 – 1																																																		
51 – 2																																																		
52 – 1																																																		
52 – 2																																																		
53 – 1																																																		
53 – 2																																																		
54 – 1																																																		
54 – 2																																																		
55 – 1																																																		
55 – 2																																																		
56 – 1																																																		
56 – 2																																																		
57 – 1																																																		
57 – 2																																																		
58 – 1																																																		
58 – 2																																																		
59 – 1																																																		
59 – 2																																																		
60 – 1																																																		
60 – 2																																																		
61 – 1																																																		
61 – 2																																																		
62 – 1																																																		
62 – 2																																																		
63 – 1																																																		
63 – 2																																																		
64 – 1																																																		
64 – 2																																																		

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[604] DIL 1 : N Extension and Delayed Ringing – Night																	<Note> D : Disable, I : Immediate, 1 : 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																	
Parameter Item	Outside Line 09					Outside Line 10					Outside Line 11					Outside Line 12					Outside Line 13					Outside Line 14					Outside Line 15					Outside Line 16														
	Selection																																																	
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N		
Default : all	✓					✓					✓					✓					✓					✓					✓					✓					✓					✓				
all Jacks																																																		
Jack 01 – 1																																																		
01 – 2																																																		
02 – 1																																																		
02 – 2																																																		
03 – 1																																																		
03 – 2																																																		
04 – 1																																																		
04 – 2																																																		
05 – 1																																																		
05 – 2																																																		
06 – 1																																																		
06 – 2																																																		
07 – 1																																																		
07 – 2																																																		
08 – 1																																																		
08 – 2																																																		
09 – 1																																																		
09 – 2																																																		
10 – 1																																																		
10 – 2																																																		
11 – 1																																																		
11 – 2																																																		
12 – 1																																																		
12 – 2																																																		
13 – 1																																																		
13 – 2																																																		
14 – 1																																																		
14 – 2																																																		
15 – 1																																																		
15 – 2																																																		
16 – 1																																																		
16 – 2																																																		

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[604] DIL 1 : N Extension and Delayed Ringing – Night		<Note> D : Disable, I : Immediate, 1 : 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																																														
Parameter Item	Outside Line 01					Outside Line 02					Outside Line 03					Outside Line 04					Outside Line 05					Outside Line 06					Outside Line 07					Outside Line 08												
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓						✓						✓						✓						✓						✓						✓						✓					
all Jacks																																																
Jack 17 – 1																																																
17 – 2																																																
18 – 1																																																
18 – 2																																																
19 – 1																																																
19 – 2																																																
20 – 1																																																
20 – 2																																																
21 – 1																																																
21 – 2																																																
22 – 1																																																
22 – 2																																																
23 – 1																																																
23 – 2																																																
24 – 1																																																
24 – 2																																																
25 – 1																																																
25 – 2																																																
26 – 1																																																
26 – 2																																																
27 – 1																																																
27 – 2																																																
28 – 1																																																
28 – 2																																																
29 – 1																																																
29 – 2																																																
30 – 1																																																
30 – 2																																																
31 – 1																																																
31 – 2																																																
32 – 1																																																
32 – 2																																																

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[604] DIL 1 : N Extension and Delayed Ringing – Night																		<Note> D : Disable, I : Immediate, 1: 1 ring delay, 3 : 3 rings delay, 6 : 6 rings delay, N : No ring																														
Parameter Item	Outside Line 17						Outside Line 18						Outside Line 19						Outside Line 20						Outside Line 21						Outside Line 22						Outside Line 23						Outside Line 24					
	Selection																																															
	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N	D	I	1	3	6	N
Default : all	✓					✓					✓					✓					✓					✓					✓					✓					✓							
all Jacks																																																
Jack 33 – 1																																																
33 – 2																																																
34 – 1																																																
34 – 2																																																
35 – 1																																																
35 – 2																																																
36 – 1																																																
36 – 2																																																
37 – 1																																																
37 – 2																																																
38 – 1																																																
38 – 2																																																
39 – 1																																																
39 – 2																																																
40 – 1																																																
40 – 2																																																
41 – 1																																																
41 – 2																																																
42 – 1																																																
42 – 2																																																
43 – 1																																																
43 – 2																																																
44 – 1																																																
44 – 2																																																
45 – 1																																																
45 – 2																																																
46 – 1																																																
46 – 2																																																
47 – 1																																																
47 – 2																																																
48 – 1																																																
48 – 2																																																

[605] Outgoing Permitted Outside Line Assignment — Day													<Note> CO : Outside Line No., E : Enable, D : Disable													
Parameter Item	CO 01	CO 02	CO 03	CO 04	CO 05	CO 06	CO 07	CO 08	CO 09	CO 10	CO 11	CO 12	CO 13	CO 14	CO 15	CO 16	CO 17	CO 18	CO 19	CO 20	CO 21	CO 22	CO 23	CO 24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 01 – 1																										
01 – 2																										
02 – 1																										
02 – 2																										
03 – 1																										
03 – 2																										
04 – 1																										
04 – 2																										
05 – 1																										
05 – 2																										
06 – 1																										
06 – 2																										
07 – 1																										
07 – 2																										
08 – 1																										
08 – 2																										
09 – 1																										
09 – 2																										
10 – 1																										
10 – 2																										
11 – 1																										
11 – 2																										
12 – 1																										
12 – 2																										
13 – 1																										
13 – 2																										
14 – 1																										
14 – 2																										
15 – 1																										
15 – 2																										
16 – 1																										
16 – 2																										

[605] Outgoing Permitted Outside Line Assignment — Day											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO01	CO02	CO03	CO04	CO05	CO06	CO07	CO08	CO09	CO10	CO11	CO12	CO13	CO14	CO15	CO16	CO17	CO18	CO19	CO20	CO21	CO22	CO23	CO24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 17 – 1																										
17 – 2																										
18 – 1																										
18 – 2																										
19 – 1																										
19 – 2																										
20 – 1																										
20 – 2																										
21 – 1																										
21 – 2																										
22 – 1																										
22 – 2																										
23 – 1																										
23 – 2																										
24 – 1																										
24 – 2																										
25 – 1																										
25 – 2																										
26 – 1																										
26 – 2																										
27 – 1																										
27 – 2																										
28 – 1																										
28 – 2																										
29 – 1																										
29 – 2																										
30 – 1																										
30 – 2																										
31 – 1																										
31 – 2																										
32 – 1																										
32 – 2																										

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[605] Outgoing Permitted Outside Line Assignment — Day													<Note> CO : Outside Line No., E : Enable, D : Disable													
Parameter Item	CO01	CO02	CO03	CO04	CO05	CO06	CO07	CO08	CO09	CO10	CO11	CO12	CO13	CO14	CO15	CO16	CO17	CO18	CO19	CO20	CO21	CO22	CO23	CO24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 33 – 1																										
33 – 2																										
34 – 1																										
34 – 2																										
35 – 1																										
35 – 2																										
36 – 1																										
36 – 2																										
37 – 1																										
37 – 2																										
38 – 1																										
38 – 2																										
39 – 1																										
39 – 2																										
40 – 1																										
40 – 2																										
41 – 1																										
41 – 2																										
42 – 1																										
42 – 2																										
43 – 1																										
43 – 2																										
44 – 1																										
44 – 2																										
45 – 1																										
45 – 2																										
46 – 1																										
46 – 2																										
47 – 1																										
47 – 2																										
48 – 1																										
48 – 2																										

[605] Outgoing Permitted Outside Line Assignment — Day											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO01	CO02	CO03	CO04	CO05	CO06	CO07	CO08	CO09	CO10	CO11	CO12	CO13	CO14	CO15	CO16	CO17	CO18	CO19	CO20	CO21	CO22	CO23	CO24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 49 – 1																										
49 – 2																										
50 – 1																										
50 – 2																										
51 – 1																										
51 – 2																										
52 – 1																										
52 – 2																										
53 – 1																										
53 – 2																										
54 – 1																										
54 – 2																										
55 – 1																										
55 – 2																										
56 – 1																										
56 – 2																										
57 – 1																										
57 – 2																										
58 – 1																										
58 – 2																										
59 – 1																										
59 – 2																										
60 – 1																										
60 – 2																										
61 – 1																										
61 – 2																										
62 – 1																										
62 – 2																										
63 – 1																										
63 – 2																										
64 – 1																										
64 – 2																										

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[606] Outgoing Permitted Outside Line Assignment — Night											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO 01	CO 02	CO 03	CO 04	CO 05	CO 06	CO 07	CO 08	CO 09	CO 10	CO 11	CO 12	CO 13	CO 14	CO 15	CO 16	CO 17	CO 18	CO 19	CO 20	CO 21	CO 22	CO 23	CO 24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 01 – 1																										
01 – 2																										
02 – 1																										
02 – 2																										
03 – 1																										
03 – 2																										
04 – 1																										
04 – 2																										
05 – 1																										
05 – 2																										
06 – 1																										
06 – 2																										
07 – 1																										
07 – 2																										
08 – 1																										
08 – 2																										
09 – 1																										
09 – 2																										
10 – 1																										
10 – 2																										
11 – 1																										
11 – 2																										
12 – 1																										
12 – 2																										
13 – 1																										
13 – 2																										
14 – 1																										
14 – 2																										
15 – 1																										
15 – 2																										
16 – 1																										
16 – 2																										

[606] Outgoing Permitted Outside Line Assignment — Night											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO 01	CO 02	CO 03	CO 04	CO 05	CO 06	CO 07	CO 08	CO 09	CO 10	CO 11	CO 12	CO 13	CO 14	CO 15	CO 16	CO 17	CO 18	CO 19	CO 20	CO 21	CO 22	CO 23	CO 24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 17 – 1																										
17 – 2																										
18 – 1																										
18 – 2																										
19 – 1																										
19 – 2																										
20 – 1																										
20 – 2																										
21 – 1																										
21 – 2																										
22 – 1																										
22 – 2																										
23 – 1																										
23 – 2																										
24 – 1																										
24 – 2																										
25 – 1																										
25 – 2																										
26 – 1																										
26 – 2																										
27 – 1																										
27 – 2																										
28 – 1																										
28 – 2																										
29 – 1																										
29 – 2																										
30 – 1																										
30 – 2																										
31 – 1																										
31 – 2																										
32 – 1																										
32 – 2																										

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

[606] Outgoing Permitted Outside Line Assignment — Night											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO 01	CO 02	CO 03	CO 04	CO 05	CO 06	CO 07	CO 08	CO 09	CO 10	CO 11	CO 12	CO 13	CO 14	CO 15	CO 16	CO 17	CO 18	CO 19	CO 20	CO 21	CO 22	CO 23	CO 24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 33 – 1																										
33 – 2																										
34 – 1																										
34 – 2																										
35 – 1																										
35 – 2																										
36 – 1																										
36 – 2																										
37 – 1																										
37 – 2																										
38 – 1																										
38 – 2																										
39 – 1																										
39 – 2																										
40 – 1																										
40 – 2																										
41 – 1																										
41 – 2																										
42 – 1																										
42 – 2																										
43 – 1																										
43 – 2																										
44 – 1																										
44 – 2																										
45 – 1																										
45 – 2																										
46 – 1																										
46 – 2																										
47 – 1																										
47 – 2																										
48 – 1																										
48 – 2																										

[606] Outgoing Permitted Outside Line Assignment — Night											<Note> CO : Outside Line No., E : Enable, D : Disable															
Parameter Item	CO 01	CO 02	CO 03	CO 04	CO 05	CO 06	CO 07	CO 08	CO 09	CO 10	CO 11	CO 12	CO 13	CO 14	CO 15	CO 16	CO 17	CO 18	CO 19	CO 20	CO 21	CO 22	CO 23	CO 24		
	Selection																									
	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
Default : all	✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓		✓	
all Jacks																										
Jack 49 – 1																										
49 – 2																										
50 – 1																										
50 – 2																										
51 – 1																										
51 – 2																										
52 – 1																										
52 – 2																										
53 – 1																										
53 – 2																										
54 – 1																										
54 – 2																										
55 – 1																										
55 – 2																										
56 – 1																										
56 – 2																										
57 – 1																										
57 – 2																										
58 – 1																										
58 – 2																										
59 – 1																										
59 – 2																										
60 – 1																										
60 – 2																										
61 – 1																										
61 – 2																										
62 – 1																										
62 – 2																										
63 – 1																										
63 – 2																										
64 – 1																										
64 – 2																										

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))
 Outside Line No.: TD816 (01 – 08), TD1232 (01 – 24)

607 – 609

	[607] Doorphone Ringing Assignment – Day								[608] Doorphone Ringing Assignment – Night								[609] Voice Mail Access Codes
Item	Parameter : Doorphone TD816 (1 – 4), TD1232 (1 – 8)																Parameter : 16 digits max., consisting of 0 – 9, *, #, Pause.
	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	
Default	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	All Jacks : Not Stored
	(Jack 01-1)								(Jack 01-1)								
	Others : Disable								Others : Disable								
All Jacks																	
Jack 01 – 1																	
01 – 2																	
02 – 1																	
02 – 2																	
03 – 1																	
03 – 2																	
04 – 1																	
04 – 2																	
05 – 1																	
05 – 2																	
06 – 1																	
06 – 2																	
07 – 1																	
07 – 2																	
08 – 1																	
08 – 2																	
09 – 1																	
09 – 2																	
10 – 1																	
10 – 2																	
11 – 1																	
11 – 2																	
12 – 1																	
12 – 2																	
13 – 1																	
13 – 2																	
14 – 1																	
14 – 2																	
15 – 1																	
15 – 2																	
16 – 1																	
16 – 2																	

	[607] Doorphone Ringing Assignment – Day								[608] Doorphone Ringing Assignment – Night								[609] Voice Mail Access Codes
Item	Parameter : Doorphone TD816 (1 – 4), TD1232 (1 – 8)																Parameter : 16 digits max., consisting of 0 – 9, *, #, Pause.
	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	
Default	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	All Jacks : Not Stored
	(Jack 01-1) Others : Disable								(Jack 01-1) Others : Disable								
All Jacks																	
Jack 17 – 1																	
17 – 2																	
18 – 1																	
18 – 2																	
19 – 1																	
19 – 2																	
20 – 1																	
20 – 2																	
21 – 1																	
21 – 2																	
22 – 1																	
22 – 2																	
23 – 1																	
23 – 2																	
24 – 1																	
24 – 2																	
25 – 1																	
25 – 2																	
26 – 1																	
26 – 2																	
27 – 1																	
27 – 2																	
28 – 1																	
28 – 2																	
29 – 1																	
29 – 2																	
30 – 1																	
30 – 2																	
31 – 1																	
31 – 2																	
32 – 1																	
32 – 2																	

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))

607 – 609

	[607] Doorphone Ringing Assignment – Day								[608] Doorphone Ringing Assignment – Night								[609] Voice Mail Access Codes
Item	Parameter : Doorphone TD816 (1 – 4), TD1232 (1 – 8)																Parameter : 16 digits max., consisting of 0 – 9, *, #, Pause.
	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	
Default	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	All Jacks : Not Stored
	(Jack 01-1)								(Jack 01-1)								
	Others : Disable								Others : Disable								
All Jacks																	
Jack 33 – 1																	
33 – 2																	
34 – 1																	
34 – 2																	
35 – 1																	
35 – 2																	
36 – 1																	
36 – 2																	
37 – 1																	
37 – 2																	
38 – 1																	
38 – 2																	
39 – 1																	
39 – 2																	
40 – 1																	
40 – 2																	
41 – 1																	
41 – 2																	
42 – 1																	
42 – 2																	
43 – 1																	
43 – 2																	
44 – 1																	
44 – 2																	
45 – 1																	
45 – 2																	
46 – 1																	
46 – 2																	
47 – 1																	
47 – 2																	
48 – 1																	
48 – 2																	

	[607] Doorphone Ringing Assignment – Day								[608] Doorphone Ringing Assignment – Night								[609] Voice Mail Access Codes
Item	Parameter : Doorphone TD816 (1 – 4), TD1232 (1 – 8)																Parameter : 16 digits max., consisting of 0 – 9, *, #, Pause.
	1	2	3	4	5	6	7	8	1	2	3	4	5	6	7	8	
Default	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	✓	All Jacks : Not Stored
	(Jack 01-1) Others : Disable								(Jack 01-1) Others : Disable								
All Jacks																	
Jack 49 – 1																	
49 – 2																	
50 – 1																	
50 – 2																	
51 – 1																	
51 – 2																	
52 – 1																	
52 – 2																	
53 – 1																	
53 – 2																	
54 – 1																	
54 – 2																	
55 – 1																	
55 – 2																	
56 – 1																	
56 – 2																	
57 – 1																	
57 – 2																	
58 – 1																	
58 – 2																	
59 – 1																	
59 – 2																	
60 – 1																	
60 – 2																	
61 – 1																	
61 – 2																	
62 – 1																	
62 – 2																	
63 – 1																	
63 – 2																	
64 – 1																	
64 – 2																	

<Note> Jack No.: TD816 (01(-1/-2) – 16 (-1/-2)), TD1232 (01(-1/-2) – 64 (-1/-2))

[614] Outgoing Permitted Outside Line Assignment – Day for ISDN Extension																CO : Outside line		E : Enable		D : Disable						
Item: ISDN Port No.	CO01	CO02	CO03	CO04	CO05	CO06	CO07	CO08	CO09	CO10	CO11	CO12	CO13	CO14	CO15	CO16	CO17	CO18	CO19	CO20	CO21	CO22	CO23	CO24		
	Default: All ports, all Outside lines – Enable																									
	E	D	E	D	E	G	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
All ports																										
01																										
02																										
03																										
04																										
05																										
06																										
07																										
08																										
09																										
10																										
11																										
12																										

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

[615] Outgoing Permitted Outside Line Assignment – Night for ISDN Extension																	CO : Outside line		E : Enable		D : Disable					
Item:	CO01	CO02	CO03	CO04	CO05	CO06	CO07	CO08	CO09	CO10	CO11	CO12	CO13	CO14	CO15	CO16	CO17	CO18	CO19	CO20	CO21	CO22	CO23	CO24		
ISDN	Default: All ports, all Outside lines – Enable																									
Port No.	E	D	E	D	E	G	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D	E	D
All ports																										
01																										
02																										
03																										
04																										
05																										
06																										
07																										
08																										
09																										
10																										
11																										
12																										

Note: ISDN Port No. — TD816 (01 – 04), TD1232 (01 – 06/Master, 07 – 12/Slave)

	[619] Extension Call Forwarding – No Answer Time					
Item	Parameter : No. of rings (0 – 12)					
Default : all	0					
Jack 01 – 1		Jack 17 – 1		Jack 33 – 1		Jack 49 – 1
01 – 2		17 – 2		33 – 2		49 – 2
02 – 1		18 – 1		34 – 1		50 – 1
02 – 2		18 – 2		34 – 2		50 – 2
03 – 1		19 – 1		35 – 1		51 – 1
03 – 2		19 – 2		35 – 2		51 – 2
04 – 1		20 – 1		36 – 1		52 – 1
04 – 2		20 – 2		36 – 2		52 – 2
05 – 1		21 – 1		37 – 1		53 – 1
05 – 2		21 – 2		37 – 2		53 – 2
06 – 1		22 – 1		38 – 1		54 – 1
06 – 2		22 – 2		38 – 2		54 – 2
07 – 1		23 – 1		39 – 1		55 – 1
07 – 2		23 – 2		39 – 2		55 – 2
08 – 1		24 – 1		40 – 1		56 – 1
08 – 2		24 – 2		40 – 2		56 – 2
09 – 1		25 – 1		41 – 1		57 – 1
09 – 2		25 – 2		41 – 2		57 – 2
10 – 1		26 – 1		42 – 1		58 – 1
10 – 2		26 – 2		42 – 2		58 – 2
11 – 1		27 – 1		43 – 1		59 – 1
11 – 2		27 – 2		43 – 2		59 – 2
12 – 1		28 – 1		44 – 1		60 – 1
12 – 2		28 – 2		44 – 2		60 – 2
13 – 1		29 – 1		45 – 1		61 – 1
13 – 2		29 – 2		45 – 2		61 – 2
14 – 1		30 – 1		46 – 1		62 – 1
14 – 2		30 – 2		46 – 2		62 – 2
15 – 1		31 – 1		47 – 1		63 – 1
15 – 2		31 – 2		47 – 2		63 – 2
16 – 1		32 – 1		48 – 1		64 – 1
16 – 2		32 – 2		48 – 2		64 – 2

[620] Lunch / Break Group Assignment								
	Item :	Parameter : Extension no. (2 – 4 digits)						
	Location No.	Default: all	Blank		Location No.		Location No.	
Group 1	1		Group 4	1		Group 7	1	
	2			2			2	
	3			3			3	
	4			4			4	
	5			5			5	
	6			6			6	
	7			7			7	
	8			8			8	
Group 2	1		Group 5	1		Group 8	1	
	2			2			2	
	3			3			3	
	4			4			4	
	5			5			5	
	6			6			6	
	7			7			7	
	8			8			8	
Group 3	1		Group 6	1				
	2			2				
	3			3				
	4			4				
	5			5				
	6			6				
	7			7				
	8			8				

[621] Cordless PITS Extension Port											
Selection											
	Yes	No		Yes	No		Yes	No		Yes	No
Default : all		✓									
Jack 01			Jack 17			Jack 33			Jack 49		
02			18			34			50		
03			19			35			51		
04			20			36			52		
05			21			37			53		
06			22			38			54		
07			23			39			55		
08			24			40			56		
09			25			41			57		
10			26			42			58		
11			27			43			59		
12			28			44			60		
13			29			45			61		
14			30			46			62		
15			31			47			63		
16			32			48			64		

Item : T1 Channel No.	[700] T1 Channel Assignment*						[701] T1 Dial Mode*			
	Selection						Selection			
Default: all	LCOT	GCOT	DID	TIE	OPX	Disable	Pulse-10	Pulse-20	DTMF-80	DTMF-160
1						✓			✓	
2										
3										
4										
5										
6										
7										
8										
9										
10										
11										
12										
13										
14										
15										
16										
17										
18										
19										
20										
21										
22										
23										
24										

*: Available for TD1232 only.

702 – 706

	[702]* T1 COT CPC (IN)	[703]* T1 DID CPC (IN)	[704]* T1 COT CPC (OUT)	[705]* T1 DID CPC (OUT)	[706]* T1 DID Receive Digits
Item : T1 Channel No.	Parameter : Time (00 – 75)	Parameter : Time (00 – 15)	Parameter : Time (00 – 75)	Parameter : Time (00 – 15)	Parameter : Digits (1 – 7)
Default: all	50	02	00	02	4
1					
2					
3					
4					
5					
6					
7					
8					
9					
10					
11					
12					
13					
14					
15					
16					
17					
18					
19					
20					
21					
22					
23					
24					

	[707]* T1 Clock Mode		[708]* T1 Line Coding		[709]* T1 Frame Sequence		[710]* T1 Frame Option				
	Selection		Selection		Selection		Selection				
	Internal	External	B8ZS	AMI	ESF	D4	C=A, D=B	C=0, D=0	C=1, D=0	C=0, D=1	C=1, D=1
Default		✓	✓		✓		✓				
Change											

	[711]* T1 First Dial Timer (CO)	[712]* T1 First Dial Timer (DID / TIE)	[713]* T1 %Break		[714]* T1 Dial Click Tone		[715]* T1 Inter Digit Pause		
	Parameter : Time (01-16)	Parameter : Time (001-255)	Selection		Selection		Selection		
			60 %	67 %	Yes	No	630 ms	830 ms	1030 ms
Default	02	02	✓		✓			✓	
Change									

	[716]* T1 Flash Detection					[717]* T1 Answer Decision Timer	[718]* T1 Break Detection		[719]* T1 Pulse Type		
	Selection					Parameter : Time (001 through 255)	Selection		Selection		
	Disable	208-1016 ms	80-1016 ms	208-1544 ms	80-1544 ms		16-96 ms	16-136 ms	Type-A	Type-B	Type-C
Default	✓					001	✓		✓		
Change											

720 – 723

	[720]* T1 TIE Ringing Service		[721]* T1 / PRI Reference CO	[722]* T1 Answer Wait Timer					[723]* T1 Sending TIE Caller ID	
	Selection		Reference Outside line no. : 01 - 24	Selection (minutes)					Selection	
Item : Outside Line No.	TIE	DIL			0	1	2	3	4	Yes
Default: all	✓		09		✓					✓
25										
26										
27										
28										
29										
30										
31										
32										
33										
34										
35										
36										
37										
38										
39										
40										
41										
42										
43										
44										
45										
46										
47										
48										

Note: [721] Outside Line No. — TD1232 (25 – 47 for PRI, 25 – 48 for T1)

Item : Port No.	[725]* T1 Extension Number	[726]* T1 Extension Name	[727]* T1 Extension COS Number	[728]* T1 Extension Outgoing Permitted Outside Line Assignment – Day		[729]* T1 Extension Outgoing Permitted Outside Line Assignment – Night		[730]* T1 Extension Voice Mail Access Codes
	Parameter : Extension no. (2-4 digits)	Parameter : Extension name (max. 10 characters)	Parameter : COS no. (1-8)	Selection		Selection		Parameter : Access code (max.16 digits)
Default: all	Not stored	Not stored	1	Enable	Disable	Enable	Disable	Not stored
01								
02								
03								
04								
05								
06								
07								
08								
09								
10								
11								
12								
13								
14								
15								
16								
17								
18								
19								
20								
21								
22								
23								
24								

*: Available for TD1232 only.

800 – 807

[800] SMDR Incoming / Outgoing Call Log Printout			
Item		Default	Selection
Outgoing Calls	All	✓	
	Toll		
	Off		
Incoming Calls	On	✓	
	Off		

[801] SMDR Format		
Item	Default	Parameter
Page Length (4 – 99)	66	
Skip Perforation (0 – 95)	0	
Note : The page length should be 4 lines or more longer than the skip perforation length.		

[803] Music Source Use					
Item	Parameter : Music				
	1	2	3	4	No Use
Default : Both	✓				
Hold					
BGM					

[804] External Pager BGM		
Item	Selection	
	Enable	Disable
Default : all		✓
Pager 1		
Pager 2		
Pager 3		
Pager 4		

Music source number:

TD816 — 1/No Use

TD1232 — 1 through 4/No Use

External pager number:

TD816 — 1

TD1232 — 1 through 4

[802] System Data Printout
Selection
Not Applicable

[805] External Pager Confirmation Tone		
	Default	Selection
On	✓	
Off		

[806] – [807] Serial Interface (RS-232C) Parameters – Port 1 / Port 2																		
	Selection																	
	NL Code		Baud Rate							Word Length		Parity Bit					Stop Bit	
Item	CR+LF	CR	150	300	600	1200	2400	4800	9600	7	8	None	Mark	Space	Even	Odd	1	2
Default : Both	✓								✓		✓		✓				✓	
[806] Port 1																		
[807] Port 2																		

Port number: TD816 — 1

TD1232 — 1 for Master system, 2 for Slave system.

[809]* DISA Security Type		
	Default	Selection
Non		
Trunk	✓	
All		

[810]* DISA Tone Detection		
	Default	Selection
Enable	✓	
Disable		

[812]* DISA DTMF Repeat		
Item	Selection	
	Repeat	Through
Default : both	✓	
Dial		
Call		

[813] Floating Number Assignment		
Item	Floating No. (2 – 4 digits)	
	Default	Parameter
Pager 1	196	
Pager 2	197	
Pager 3	296	
Pager 4	297	
DISA 1	198	
DISA 2	298	
MODEM	299	
E-Group 1	191	
E-Group 2	192	
E-Group 3	193	
E-Group 4	194	
E-Group 5	291	
E-Group 6	292	
E-Group 7	293	
E-Group 8	294	

Floating station:

TD816 — Pager 1, MODEM,
Extension Groups 1 through 8

TD1232 — Pagers 1 through 4,
DISA 1 and 2, MODEM,
Extension Groups 1 through 8

[814] Modem Standard		
	Default	Selection
BELL	✓	
CCITT		

[815]* DISA Built-in Auto Attendant	
Item : DISA AA No.	Parameter : Extension/Floating No. (2 – 4 digits)
Default	Disable
0	
1	
2	
3	
4	
5	
6	
7	
8	
9	

817, 818, 820

[817] KX-TD197 Baud Rate Set		
	Default	Selection
BELL		
V.34-9600		
V.34-14400		
V.34-19200		
V.34-28800		
V.34-33600	✓	

	[818] Doorphone Tone Frequency Selection								[820] Doorphone Ringing Time	
	Selection								Selection	
Item :	Type 1	Type 2	Type 3	Type 4	Type 5	Type 6	Type 7	Type 8	15 s	30 s
Default: all		✓								✓
all doorphones										
1										
2										
3										
4										
5										
6										
7										
8										
Selection : (TD816) doorphone 1 – 4 (TD1232) doorphone 1 – 8										

[990] System Additional Information

Area 01 [Bits 1–16]														
Bit	Un-used	15	14 – 13	12 – 11	10	9	8	Unused				3	2	1
Default	—	0	1 0	1 0	0 0	0 0	1 1	0 0	0 0	0 0	0 0	0 0	0 0	1
Selection														

Area 02 [Bits 1–16]															
Bit	Unused	14	13	12	11	10	9	8	7	6	Un-used	4	3	2	1
Default	1	1	1	0 0	1 1	0 0	0 0	0 0	0 0	1 0	0	1	1	0	0
Selection															

Area 03 [Bits 1–16]																
Bit	16	15	14	13	12	11	10	9	8	7	6	5	4	3	2	1
Default	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0	0
Selection																

Area 04 [Bits 1–16]														
Bit	Unused		13	Unused	10	9	8	7	6	5	4	3	2	1
Default	1	1	1	1	1	1	1	0	0	0	0	0	0	0
Selection														

Area 05 [Bits 1–16]																
Bit	16	15	14	13	12	11	10	9	Un-used	7	6	5	Un-used	3	2	1
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection																

< Selection >
Area Bit
01 – 1 : **0** (Ringing back tone) / **1** (Music on Hold)
01 – 2 : **0** (Consultation Hold) / **1** (Disconnection)
01 – 3 : **0** (Disconnection signal) / **1** (External Feature Access)
01 – 8 : **0** (Disable) / **1** (Enable)
01 – 9 : **0** (Consultation) / **1** (Disconnection)
01 – 10 : **0** (80 ms) / **1** (160 ms)
01 – 11-12 : **00** (0.5 s) / **01** (1.0 s) / **10** (1.5 s) / **11** (2.0 s)

< Selection >
Area Bit
01 – 13-14 : **00** (0.5 s) / **01** (1.0 s) / **10** (1.5 s) / **11** (2.0 s)
01 – 15 : **0** (System) / **01** (VPS)
02 – 1 : **0** (Initiating extension) / **1** (Operator 1)
02 – 2 : **0** (Both calls) / **1** (Outgoing calls only)
02 – 3 : **0** (Disable) / **1** (Enable)
02 – 4 : **0** (No check) / **1** (Check)
02 – 6 : **0** (Disable) / **1** (Enable)
02 – 7 : **0** (60 %) / **1** (67 %)
02 – 8 : **0** (Extension number) / **1** (Free)
02 – 9 : **0** (Names) / **1** (Numbers)
02 – 10 : **0** (Internal music source) / **1** (External music source)
02 – 11-12 : **00** (630 ms) / **01** (830 ms) / **10** (1030 ms)
02 – 13 : **0** (Normal) / **1** (Distinctive)
02 – 14 : **0** (84 ms-1000 ms) / **1** (200 ms-1000 ms)
03 – 1-16 : **0** (0 dB) / **1** (-3dB)
& 04 – 1-8
04 – 9 : **0** (Prevent) / **1** (Allow)
04 – 10 : **0** (Prevent) / **1** (Allow)
04 – 13 : **0** (Disable) / **1** (Enable)
05 – 1 : **0** (Enable) / **1** (Disable)
05 – 2 : **0** (10 times) / **1** (No limitation)
05 – 3 : **0** (Disable) / **1** (Enable)
05 – 5 : **0** (Immediately) / **1** (After 5 seconds)
05 – 6 : **0** (Disable) / **1** (Enable)
05 – 7 : **0** (Enable) / **1** (Disable)
05 – 9 : **0** (Disable) / **1** (Enable)
05 – 10 : **0** (Terminate) / **1** (Flash)
05 – 11 : **0** (3 times by 40 ms) / **1** (2 times by 280 ms)
05 – 12 : **0** (<Incoming> + caller no.) / **1** (<I> + caller no. + name)
05 – 13 : **0** (Enable) / **1** (Disable)
05 – 14 : **0** (IRNA) / **1** (Reorder tone is sent)
05 – 15 : **0** (Operators 1 and 2 simultaneously) / **1** (Operators 1 first and then Operator 2)
05 – 16 : **0** (Enable) / **1** (Disable)

[990] System Additional Information

[990] System Additional Information															
Area 06 [Bits 1 – 16]															
Bit	Unused	14	Unused				8	7	6	5	4	Unused	1		
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection															
Area 07 [Bits 1 – 16]															
Bit	16	15 – 14	13 – 12	11 – 10	9 – 8	7	Un-used	5	Unused			1			
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection															
Area 08 [Bits 1 – 16]															
Bit	Unused										3	Un-used	1		
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection															
Area 09 [Bits 1 – 16]															
Bit	Unused			12	Unused	9	Unused				4 – 3	Unused			
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection															
Area 10 [Bits 1 – 16]															
Bit	Un-used	15	Unused	12	11	Unused	8	7	6	5	4	3	2	1	
Default	1	1	1	1	1	1	1	1	1	1	1	1	1	1	1
Selection															
<p>< Selection ></p> <p>Area Bit</p> <p>06 – 1 : 0 (Not printed out) / 1 (Printed out)</p> <p>06 – 4 : 0 (Enable) / 1 (Disable)</p> <p>06 – 5 : 0 (First entered code) / 1 (Last entered code)</p> <p>06 – 6 : 0 (Receive) / 1 (Not receive)</p> <p>06 – 7 : 0 (Receive) / 1 (Not receive)</p> <p>06 – 8 : 0 (Disable) / 1 (Enable)</p> <p>06 – 14 : 0 (Allow) / 1 (Prevent)</p> <p>07 – 1 : 0 (Enable) / 1 (Disable)</p> <p>07 – 5 : 0 (Disable) / 1 (Enable)</p> <p>07 – 7 : 0 (Beep) / 1 (Usual music source)</p> <p>07 – 8-9 : 01 (IRNA) / 10/11 (Receive at the CO button) / 00 (Busy tone is sent)</p> <p>07 – 10-11 : 01 (IRNA) / 10/11 (Receive at the CO button) / 00 (Busy tone is sent)</p> <p>07 – 12-13 : 01 (IRNA) / 10/11 (Receive at the CO button) / 00 (Busy tone is sent)</p> <p>07 – 14-15 : 01 (IRNA) / 10/11 (Receive at the CO button) / 00 (Busy tone is sent)</p> <p>07 – 16 : 0 (Enable) / 1 (Disable)</p> <p>08 – 1 : 0 (Send) / 1 (Not send)</p> <p>08 – 3 : 0 (Send) / 1 (Not send)</p> <p>09 – 3-4 : 11 (R60 / RON) / 10 (RON / RON) / 01 (RON / R60) / 00 (R60 / R60)</p> <p>09 – 9 : 0 (Remains the current display) / 1 (Call duration)</p> <p>09 – 12 : 0 (Permit) / 1 (Disallow)</p> <p>10 – 1-8 : 0 (Send) / 1 (Not send)</p> <p>10 – 11 : 0 (Disable) / 1 (Enable)</p> <p>10 – 12 : 0 (3 s) / 1 (5 s)</p> <p>10 – 15 : 0 (Original extension number / name) / 1 (CLIP)</p>															

[991] COS Additional Information																
COS 1 [Bits 1 – 16]																
Bit	Unused											5	4 – 1			
Default	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0
Selection																
COS 2 [Bits 1 – 16]																
Bit	Unused											5	4 – 1			
Default	1	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0
Selection																
COS 3 [Bits 1 – 8] / System Additional Information 2 [Bits 9 – 16]																
Bit	Un-used	15	14	13	12	11	10 – 9	Unused			5	4 – 1				
Default	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	
Selection																
COS 4 [Bits 1 – 8] / System Additional Information 2 [Bits 9 – 16]																
Bit	Unused						10	9	Unused			5	4 – 1			
Default	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	
Selection																
COS 5 [Bits 1 – 16]																
Bit	Unused	14	13	12	Un-used	10	Unused			5	4 – 1					
Default	1	1	0	0	1	1	1	1	1	1	1	0	0	0	0	
Selection																
COS 6 [Bits 1 – 16]																
Bit	Unused						10	Unused			5	4 – 1				
Default	1	1	1	1	1	1	1	1	1	1	1	0	0	0	0	
Selection																

< Selection >

Bit

1-4 : **0000** (no limit) / **0001** (1 digit) / **0010** (2 digits) / **0011** (3 digits) / **0100** (4 digits) / **0101** (5 digits) / **0110** (6 digits) / **0111** (7 digits) / **1000** (8 digits) / **1001** (9 digits) / **1010** (10 digits) / **1011** (11 digits) / **1100** (12 digits) / **1101** (13 digits) / **1110** (14 digits) / **1111** (15 digits)

5 : **0** (Disable) / **1** (Enable)

COS Bit

3 – 9-10 : **00** (After 5 s) / **01** (After 10 s) / **10** (After 15 s) / **11** (Not activate) /

3 – 11 : **0** (Keep outgoing message) / **1** (Music on Hold / Ringback tone)

3 – 12 : **0** (Second) / **1** (Top)

3 – 13 : **0** (Second) / **1** (Top)

3 – 14 : **0** (Second) / **1** (Top)

3 – 15 : **0** (Second) / **1** (Top)

4 – 9 : **0** (Specific) / **1** (None)

4 – 10 : **0** (Clear) / **1** (Do not clear)

5 – 10 : **0** (ringback tone 2) / **1** (ringback tone 1)

5 – 12 : **0** (Wait) / **1** (IRNA destination)

5 – 13-14 : **00** (64 ms × 2) / **01** (64 ms × 3) / **10** (64 ms × 4) / **11** (64 ms × 1)

6 – 10 : **0** (IRNA) / **1** (Time Table)

[991] COS Additional Information																				
COS 7 [Bits 1 – 16]												< Selection > Bit 1-4 : 0000 (no limit) / 0001 (1 digit) / 0010 (2 digits) / 0011 (3 digits) / 0100 (4 digits) / 0101 (5 digits) / 0110 (6 digits) / 0111 (7 digits) / 1000 (8 digits) / 1001 (9 digits) / 1010 (10 digits) / 1011 (11 digits) / 1100 (12 digits) / 1101 (13 digits) / 1110 (14 digits) / 1111 (15 digits) 5 : 0 (Disable) / 1 (Enable)								
Bit	Unused										5					4 – 1				
Default	1	1	1	1	1	1	1	1	1	1	1					1	0	0	0	0
Selection																				
COS 8 [Bits 1 – 16]																				
Bit	Unused										5					4 – 1				
Default	1	1	1	1	1	1	1	1	1	1	1					1	0	0	0	0
Selection																				

**Panasonic Consumer Electronics Company,
Division of Matsushita Electric Corporation of America**
One Panasonic Way, Secaucus, New Jersey 07094
www.panasonic.com

**Panasonic Sales Company (“PSC”),
Division of Matsushita Electric of Puerto Rico, Inc.**
Ave. 65 de Infantería, Km. 9.5,
San Gabriel Industrial Park, Carolina,
Puerto Rico 00985

© 2001 Kyushu Matsushita Electric Co., Ltd. All Rights Reserved.

Printed in the United Kingdom

PSQX2580YA KA0801HK2052