


MKW-DK

Motion Detector Interface Adaptor for Video Door Stations

- INSTRUCTIONS -

The MKW-DK Adaptor allows any standard *motion detector or activation device with a normally open contact* to be interfaced with any 2-wire Aiphone Video Door Station (except KB-DAR). When the activation device is tripped, the camera will turn on, and a chime (or tone) will be heard at the inside monitor station(s), indicating that there is some activity near the door station location.

WIRING DIAGRAM:

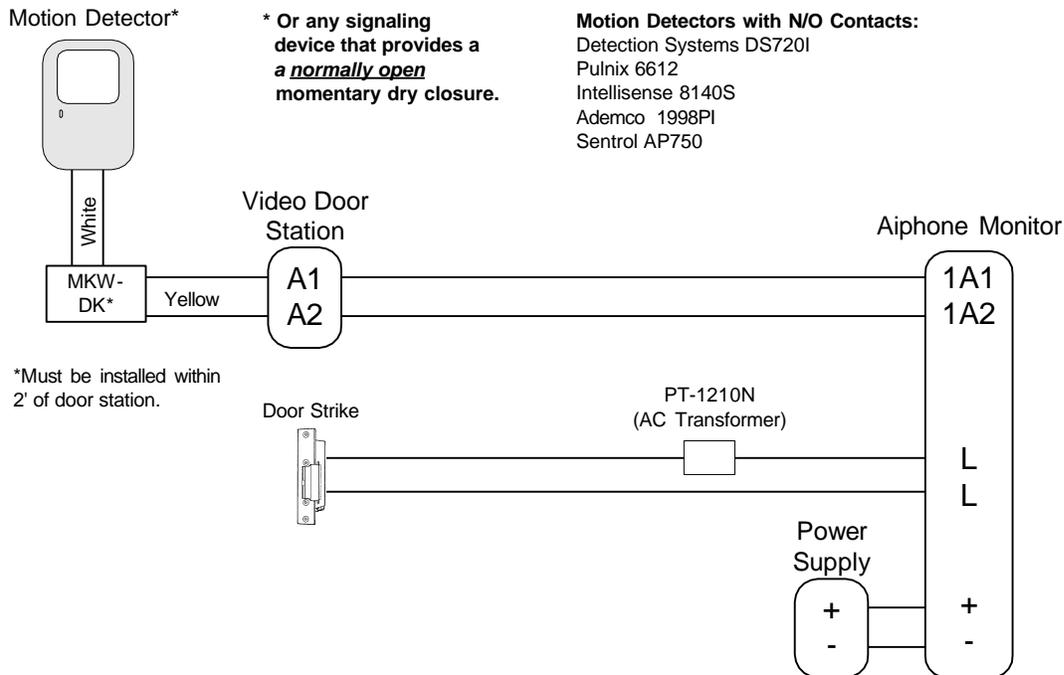

Installation Guidelines:

1. The motion detector must provide a *normally open momentary contact*. A Photoelectric beam, pressure pad, or remote call button can also be used to activate the video door station.
2. MKW-DK must be installed within 2 feet of video door station.
3. The MKW-DK can be used to connect a motion detector to all MK, MY, KA, and KC series video door stations.
4. The above diagram is representative of the installation of the MKW-DK to an Aiphone video system. Terminal definitions will vary depending on the system being installed.
5. The MKW-DK is not compatible with the KB-DAR. Contact Aiphone for information on model KB-DAR-M (KB-DAR with input for Motion Detector).

Note:

For complete system installation, please refer to the instruction manuals included with the video system.

Aiphone Communication Systems
1700 130th Ave. N.E.
Bellevue, WA 98005
(425) 455-0510
FAX (425) 455-0071

TOLL FREE TECHNICAL SUPPORT:
(800) 692-0200
TOLL FREE FAX LINE:
(800) 832-3765
E-MAIL: tech-serv@aiphone.com

MKW-DK Instr.
0102bkjd