

NE-NVP/B

Vandal Proof and Weather Resistant Sub Station for NEM


SBX-NVP

Surface Mount Box for NE-NVP/B

- INSTRUCTIONS -

The NE-NVP/B is a vandal proof and weather resistant sub station designed for use with the NEM system. It is constructed of 11 gauge carbon steel with a white powder-coated finish. The NE-NVP/B can be flush or surface mounted and includes tamper proof screws and a tool for installation.

WIRING DIAGRAM:

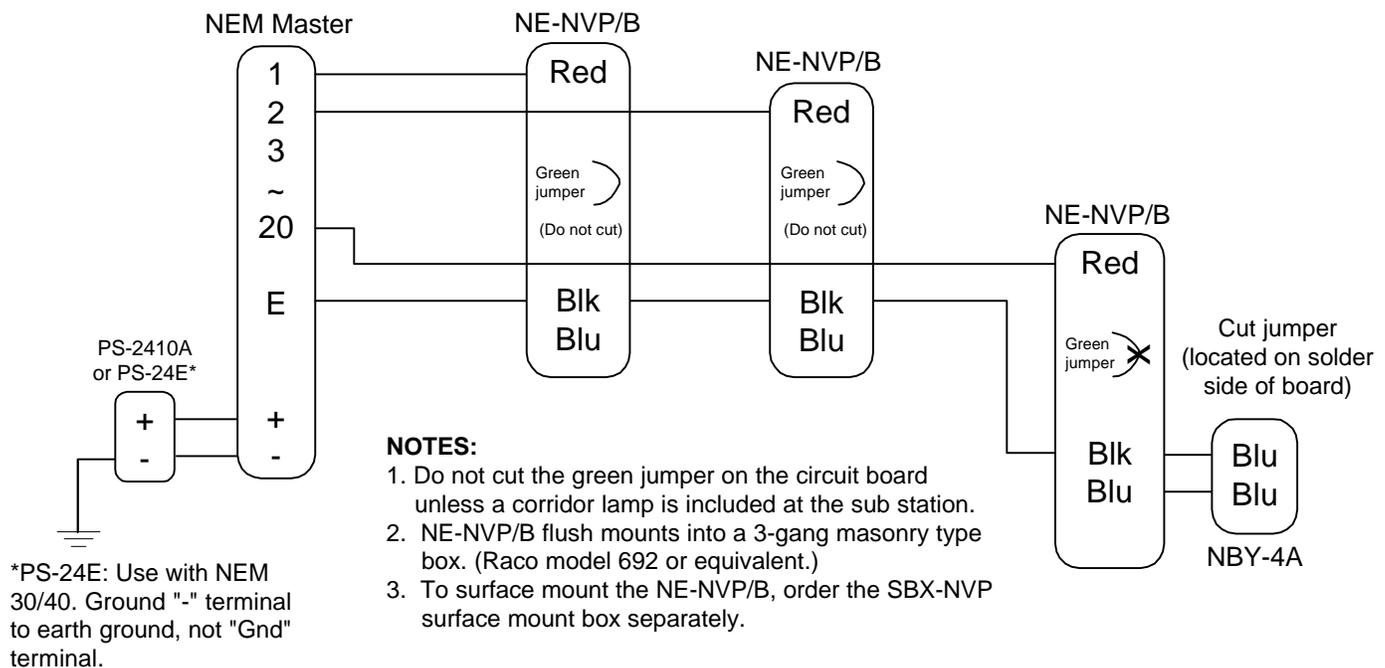

SPECIFICATIONS:

- Power Source: Supplied by master station.
- Speaker: 20 ohms, 3" diameter, water proof and puncture resistant, 2.5 oz. ceramic magnet.
- Call Button: SPST call button, momentary activation.
- Call Annunciation: Pressing the call button at sub activates and latches call at NEM master. The master station's LED will be lit and a ringing tone will be heard until the call is answered.
- Communication: Hands free at sub. Master is push-to-talk or VOX handset.
- Faceplate: 11 gauge carbon steel with powder-coated white baked epoxy finish.
- Mounting Hardware: 6x32 tamper proof screws and tool for installation
- Terminations: Color-coded prewired pigtails
- Wiring: 2 conductors homerun; or 1 common plus 1 individual per sub, looped through each sub. Shielded cable is recommended.
Use Aiphone #822202 or #821802 for homerun wiring, #822206 for up to 5 stations on each run, or #822210 for up to 9 stations on each run.
- Wiring Distance: 420' with 22AWG; 1,000' with 18AWG.
- Dimensions (HxWxD): NE-NVP/B alone: 7-1/2" x 5-1/2" x 2". With SBX-NVP: 8-5/8" x 6-5/8" x 2-1/4"