

TRUNK ADAPTER V-5335300

INTRODUCTION

The Trunk Adapter interfaces a loop-start trunk port, key system line port, or stand alone telephone set to page controls that do not provide a trunk port access input.

Power Requirements

- -24VDC @ 37mA

Dimensions/Weight

- 4.0"W x 2.0"H x 1.0"D
(10.2cm x 5.1cm x 2.5cm)
- 2.0 lbs (0.9 kg)

INSTALLATION CONNECTIONS

Trunk Adapter connections are shown in Figure 1. Refer to the manuals supplied with each paging system for more information. Table 1 lists the Trunk Adapter/AmpliCenter connections.

CAUTION:

Do not connect a Trunk Adapter manufactured before July 1988 to an Amplicenter. Doing so may damage the Trunk Adapter. See the Trunk Adapter front panel for the date of manufacture.



TECHNICAL ASSISTANCE

When calling, have a VOM and a telephone test set available and call from the job site. Call (540) 427-3900 and ask for PagePac Technical Support, or call (540) 427-6000 for Valcom 24-hour Automated Support or visit our websites at <http://www.pagepac.com> and www.valcom.com.

Should repairs be necessary, attach a tag to the unit clearly stating company name, address, phone number, contact person, and the nature of the problem. Send the unit to:

Valcom, Inc.
PagePac[®] Repair Dept.
5614 Hollins Road
Roanoke, VA 24019-5056

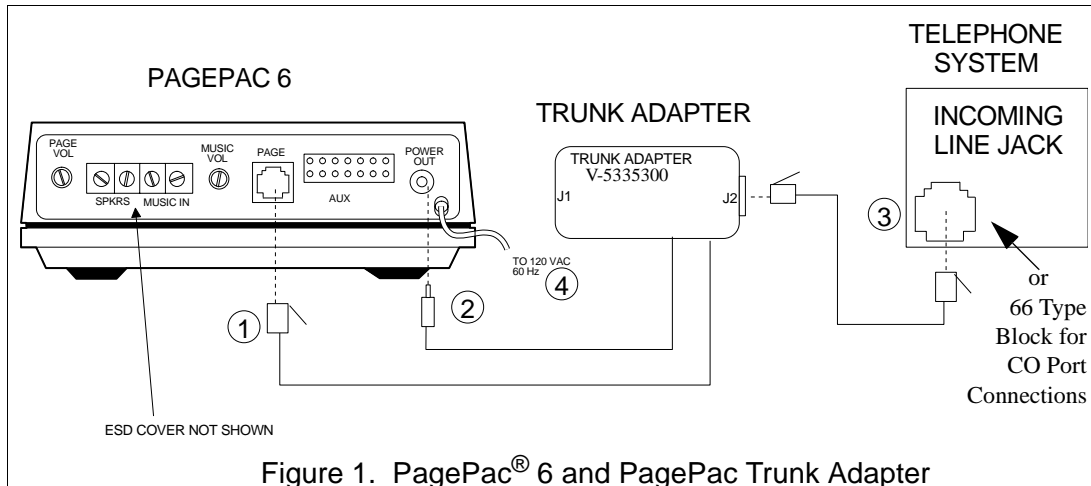


Figure 1. PagePac® 6 and PagePac Trunk Adapter Connections to Telephone System Line Port

Call Technical Support for information on connecting the Trunk Adapter to other page control units.

Table 1. Trunk Adapter/Amplifier Connections

Cable	Lead	Connect To
DC Cable	Black Blk/Wht	-24 VDC GND
Modular Cable	Red Green Yellow Black	PAGE IN PAGE IN C1 GROUND