


TalkTo[®] 308

Electronic Key Telephone System System Manual

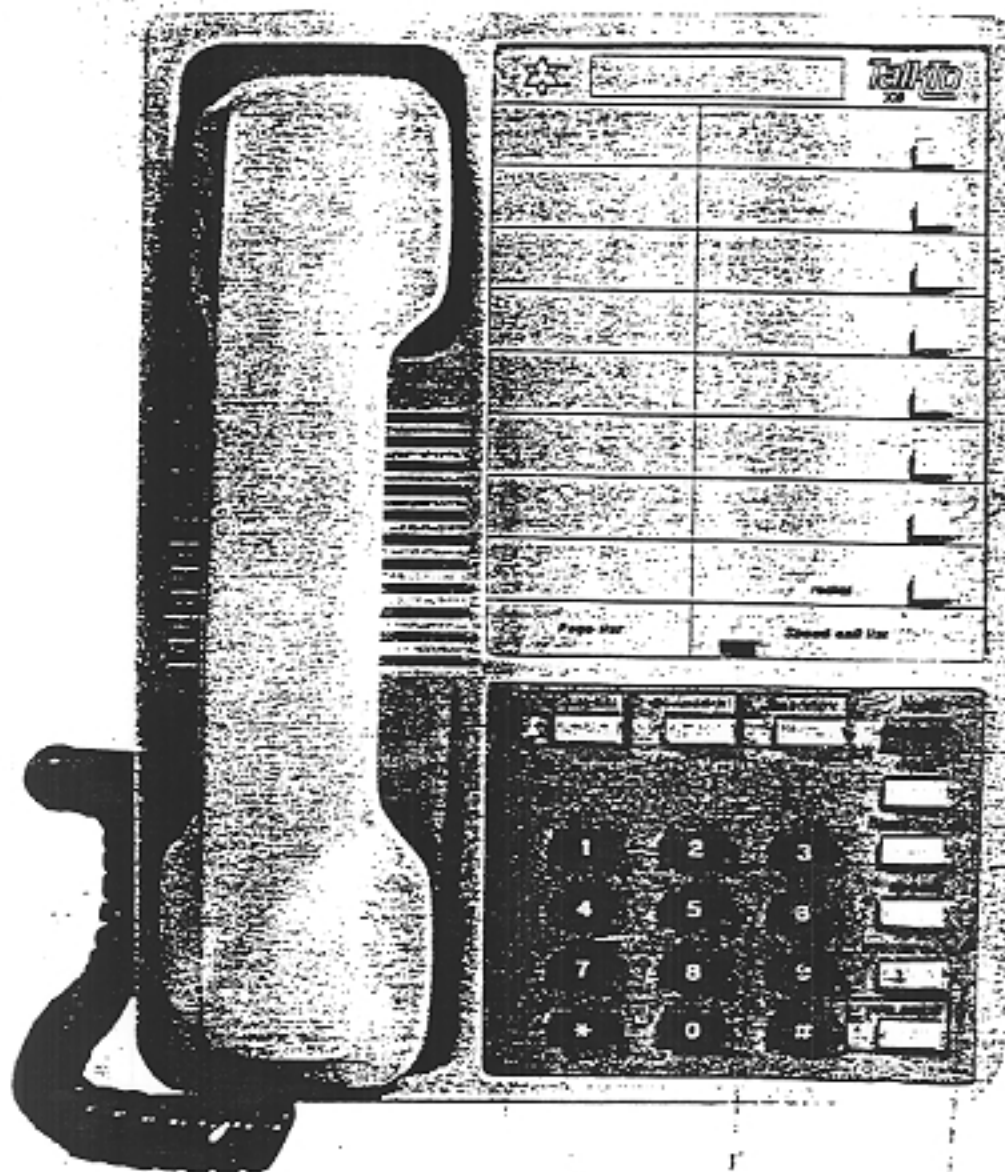

The most answers for small business

Introduction

Congratulations . . .

You have now joined the growing Trillium family. You will soon discover the benefits of communicating with the TalkTo 308 Electronic Key Telephone System.

Designed to the most stringent specifications, and built using the latest technology, your TalkTo 308 System will provide you with years of reliable service.

Your System can accommodate a maximum of three outside lines, up to 8 TalkTo 308 Sets and has three intercom paths.

Many options are available to further enhance your TalkTo 308 System;

Handsfree (speakerphone) Sets

Door Answering

Power Fail Transfer

Call Announce Units

Set Stand/Wall Mount Brackets

Details of these options can be obtained from your Trillium Authorized Dealer.

Your System Manual contains all the information about the TalkTo 308 System including sections on installation, feature selection and programming, system operation and troubleshooting. The TalkTo 308 Installation Guide, included with your key service unit, is designed as a working "blue print" to provide you with the necessary installation information at a glance.

This manual uses the term "station" which refers to a specific TalkTo 308 Telephone Set or Call Announce Unit. The station number is determined by the jack on the key service unit.

The Canadian Department of Communications has assigned a load number of 29AB to this system.



308

Table of Contents

	Page
Introduction	2
TalkTo 308 Set Keys	3
Feature Description	4
Feature Selection	5
Feature Programming	6
Installation	8
Test Cord	8
Alternate Station Wiring Method C	9
Installing Optional Components	10
Operating Instructions	
Making an Outgoing Call	11
Answering an Incoming Call	11
Last Number Redial	11
Call Hold	11
Call Transfer	11
Exclusive Call Hold	11
Conference Calls	11
Line Monitoring	11
Direct Station Calling	12
All Station Paging	12
External Loudspeaker Paging	12
Private Speed Call	12
Common Speed Call	13
Room Monitoring	13
Flash/Cancel	13
Do Not Disturb	14
Music	14
Night Transfer	14
Door Answering (option)	14
Power Fail Transfer (option)	14
Call Announce Unit (option)	14
Indicator Lamps	15
System Tones	15
Troubleshooting	16
Technical Specifications	18
Common Speed Call List	19
Reprogramming Sheets	(in pocket)

You may wish to familiarize yourself with the Set keys before proceeding to the Operating Instructions.

Direct Station Select/Speed Call

These dual-function keys are used to make direct station and all station intercom calls to other TalkTo Sets and Call Announce Units. When used in conjunction with an outside line key, these keys allow you to dial private speed call numbers.

Last Number Redial

When an outside line is accessed the last number redial key will redial the last number dialed.

Line Select

The three line select keys are used to access any of the outside lines, unless programmed otherwise. Line select key three is used to access the optional Door Answering feature.

Hold

Outside calls are put on hold and exclusive hold by pressing the hold key.

Conference

The Conference key is used for setting up three-party conference calls.

Calibrated Flash/Cancel

The function of this key is programmable as a hookswitch flash or cancel, but not both.

Flash — provides a calibrated hookswitch flash for PABX and Centrex applications, or to your telephone exchange to access custom calling features.

Cancel — used to cancel external calls and return dial tone without hanging up the handset.

Speed

The speed key is used during the programming of private and common speed call numbers, and for dialing common speed call numbers.

Speaker On/Off

Used to turn the Set speaker on and off and to terminate a handsfree call.

Microphone On/Off

Used to turn the microphone on and off.

Ringer Volume Control


Situated on the upper left side of the Set, controls the volume of the tone ringer.

Speaker Volume Control

Situated on the left side of the Set, controls the volume of the sound at the speaker.

Handsfree

If the model number of your Set is 90-0049, it is equipped for your convenience with the handsfree speakerphone option. This allows you to make and receive calls completely handsfree, providing the microphone and speaker are turned ON.

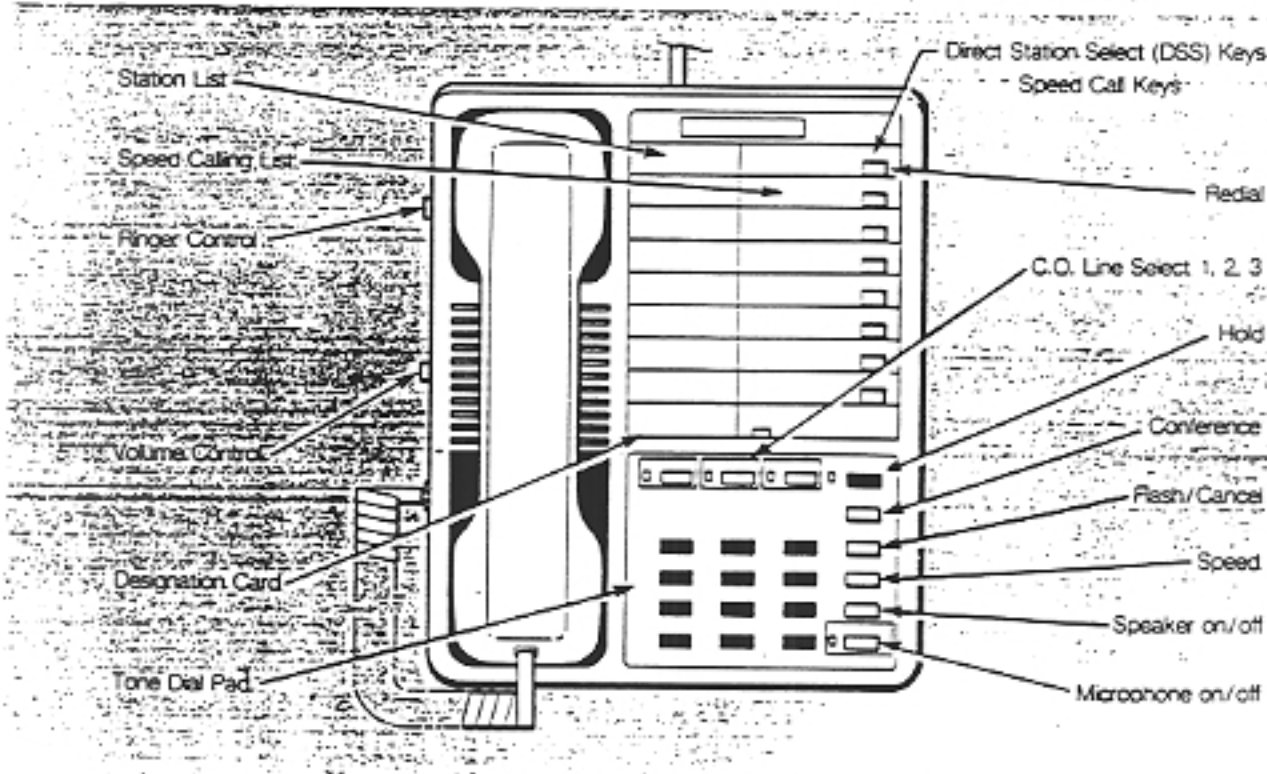

TalkTo 308 Set keys and switch layout.