

UNIVERSAL 70-VOLT BI-DIRECTIONAL CABINET SPEAKER (V-5330205)

The Universal Bi-directional 70-volt Cabinet Speaker can be used as a wall, ceiling or corridor speaker.

Dimensions/Weight


- 10.5"SQ x 4.0"D (26.7cm x 10.2cm)
- 7.0 lbs. (3.2 kg)

Mounting

The Universal Cabinet Speaker should be mounted indoors on a suitable flat surface, such as a wall or ceiling, using the bracket provided.

1 Use the bracket as a template and mark a screw location in the center of each keyhole slot.

2 Install screws in the locations marked. Use anchors if necessary to provide a solid mounting (screws and anchors are provided). Leave enough room so the bracket can be slipped over the screw heads.

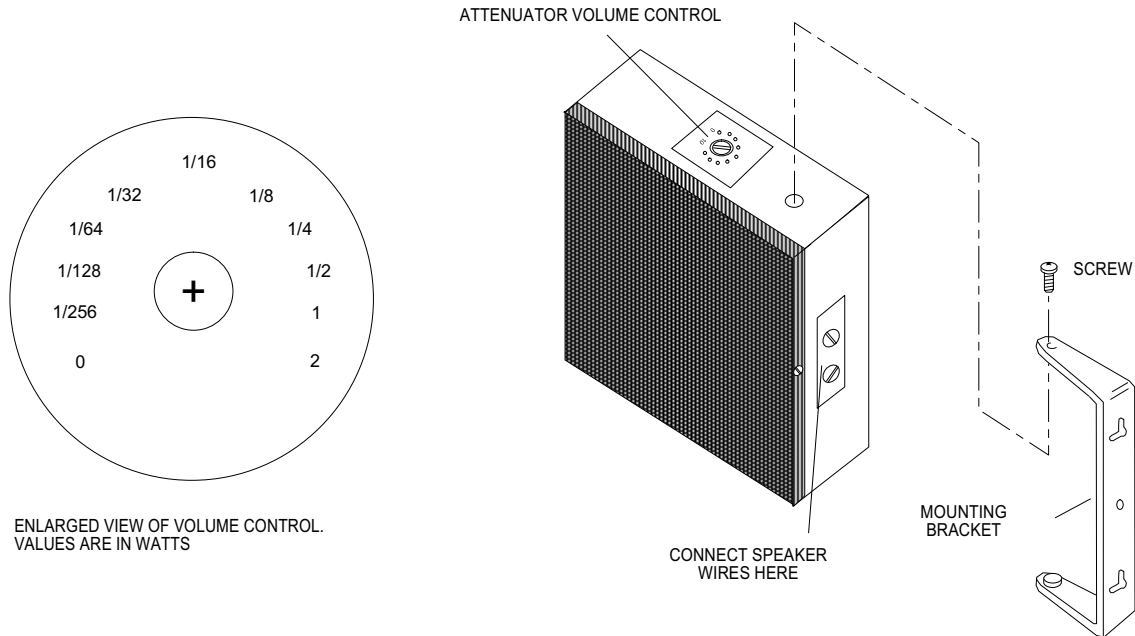

3 Maintain proper speaker phasing. Each conductor in the speaker wire must be connected to the same terminal on each speaker, as shown below.

