


LE-Bn INSTALLATION INSTRUCTIONS

(SUPPLEMENT TO THE PRODUCT INSTRUCTIONS)

LE-B2, LE-B4, LE-B6, LE-B10 Selective Call Entry Station for LEM, LEF Masters


MOUNTING INSTRUCTIONS

1. Cut a hole in the wall that is 9-1/16" X 6-1/8". (Ensure that a mounting depth of at least 2-11/16" is available.)
2. Pass cable through knockout holes.
3. Secure mounting box to wall so that front of mounting box is flush with the outside edge of the wall.
4. Connect wires to the unit. (See wiring diagram)
5. Attach the unit to mounting box using the supplied screws.

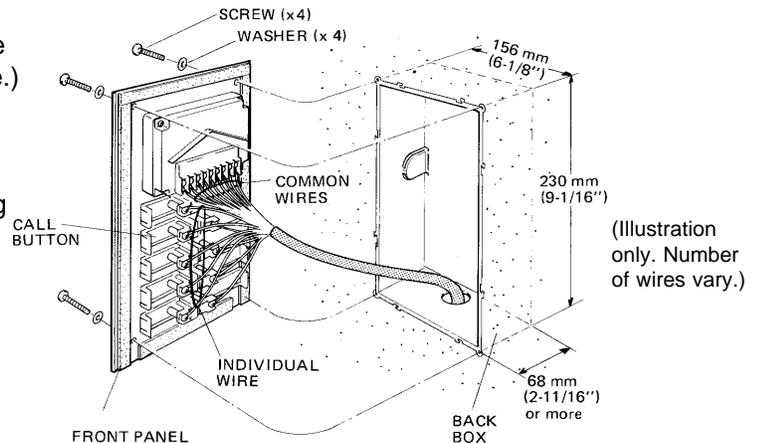

DIRECTORY LAMP INSTALLATION:

1. Attach the lamp mounting plate as shown in the drawing using the supplied screws. The lamp should face the back of the mounting box and point down.
2. Connect the RED wire to "+" of the PS-12C.
3. Connect the BLACK wire to the "-" of the PS-12C.
4. Lamp is 12VDC, 1W.

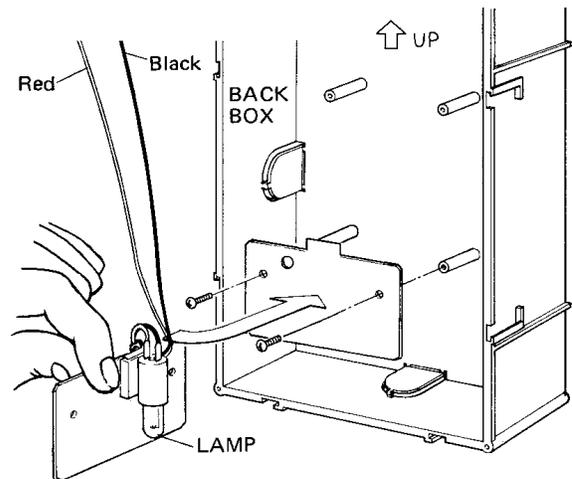

ENTERING TENANT'S NAME:

1. Remove the directory card cover by pressing on edge of the card cover next to the call button.
2. Remove the directory card in the same manner.
3. Fill in the tenant's name in the space provided.
4. Replace card and cover.

